Equivalents of the Axiom of Choice

Krzysztof Grąbczewski


October 24, 2026

Abstract

This development [1] proves the equivalence of seven formulations of the well-ordering theorem and twenty formulations of the axiom of choice. It formalizes the first two chapters of the monograph *Equivalents of the Axiom of Choice* by Rubin and Rubin [2]. Some of this mmaterial involves extremely complex techniques.

Contents

0.1 Lemmas useful in each of the three proofs 22
0.2 Lemmas used in the proofs of *AC1* ⟹ *WO2* and *AC17* ⟹ *AC1* 23
0.3 The proof of *AC1* ⟹ *WO2* 24

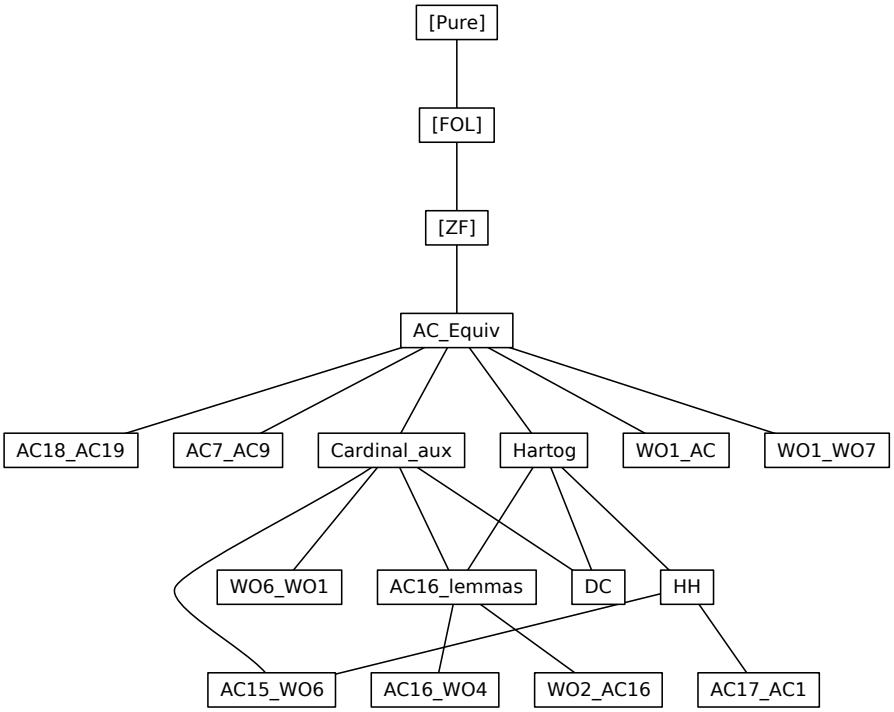

theory *AC_Equiv*
imports *ZF*
begin

definition
"*WO1* ≡ ∀*A*. ∃*R*. *well_ord(A,R)*"

definition
"*WO2* ≡ ∀*A*. ∃*a*. *Ord(a)* ∧ *A*≈*a*"

definition
"*WO3* ≡ ∀*A*. ∃*a*. *Ord(a)* ∧ (∃*b*. *b* ⊆ *a* ∧ *A*≈*b*)"

definition
"*WO4(m)* ≡ ∀*A*. ∃*a f*. *Ord(a)* ∧ *domain(f)*=*a* ∧
(⋃*b*<*a*. *f*‘*b*) = *A* ∧ (∀*b*<*a*. *f*‘*b* ≲ *m*)"

definition
"*WO5* ≡ ∃*m* ∈ *nat*. *1*≤*m* ∧ *WO4(m)*"

definition
"*WO6* ≡ ∀*A*. ∃*m* ∈ *nat*. *1*≤*m* ∧ (∃*a f*. *Ord(a)* ∧ *domain(f)*=*a*
∧ (⋃*b*<*a*. *f*‘*b*) = *A* ∧ (∀*b*<*a*. *f*‘*b* ≲ *m*))"

definition
"*WO7* ≡ ∀*A*. *Finite(A)* ⟷ (∀*R*. *well_ord(A,R)* ⟶ *well_ord(A,converse(R))*)"

definition
"*WO8* ≡ ∀*A*. (∃*f*. *f* ∈ (∏*X* ∈ *A*. *X*)) ⟶ (∃*R*. *well_ord(A,R)*)"

definition

pairwise_disjoint :: "*i* ⇒ *o*" **where**
"*pairwise_disjoint(A)* ≡ ∀*A1* ∈ *A*. ∀*A2* ∈ *A*. *A1* ∩ *A2* ≠ *0* ⟶ *A1*=*A2*"

definition
sets_of_size_between :: "[*i*, *i*, *i*] ⇒ *o*" **where**
"*sets_of_size_between(A,m,n)* ≡ ∀*B* ∈ *A*. *m* ≲ *B* ∧ *B* ≲ *n*"

definition
"*AC0* ≡ ∀*A*. ∃*f*. *f* ∈ (∏*X* ∈ *Pow(A)*-{*0*}. *X*)"

definition
"AC1 ≡ ∀A. 0∉A ⟶ (∃f. f ∈ (∏X ∈ A. X))"

definition
"AC2 ≡ ∀A. 0∉A ∧ pairwise_disjoint(A)
⟶ (∃C. ∀B ∈ A. ∃y. B ∩ C = {y})"
definition
"AC3 ≡ ∀A B. ∀f ∈ A->B. ∃g. g ∈ (∏x ∈ {a ∈ A. f‘a≠0}. f‘x)"

definition
"AC4 ≡ ∀R A B. (R ⊆ A*B ⟶ (∃f. f ∈ (∏x ∈ domain(R). R‘‘{x})))"

definition
"AC5 ≡ ∀A B. ∀f ∈ A->B. ∃g ∈ range(f)->A. ∀x ∈ domain(g). f‘(g‘x)
= x"

definition
"AC6 ≡ ∀A. 0∉A ⟶ (∏B ∈ A. B)≠0"

definition
"AC7 ≡ ∀A. 0∉A ∧ (∀B1 ∈ A. ∀B2 ∈ A. B1≈B2) ⟶ (∏B ∈ A. B) ≠
0"

definition
"AC8 ≡ ∀A. (∀B ∈ A. ∃B1 B2. B=⟨B1,B2⟩ ∧ B1≈B2)
⟶ (∃f. ∀B ∈ A. f‘B ∈ bij(fst(B),snd(B)))"

definition
"AC9 ≡ ∀A. (∀B1 ∈ A. ∀B2 ∈ A. B1≈B2) ⟶
(∃f. ∀B1 ∈ A. ∀B2 ∈ A. f‘⟨B1,B2⟩ ∈ bij(B1,B2))"

definition
"AC10(n) ≡ ∀A. (∀B ∈ A. ¬Finite(B)) ⟶
(∃f. ∀B ∈ A. (pairwise_disjoint(f‘B) ∧
sets_of_size_between(f‘B, 2, succ(n)) ∧ ⋃(f‘B)=B))"

definition
"AC11 ≡ ∃n ∈ nat. 1≤n ∧ AC10(n)"

definition
"AC12 ≡ ∀A. (∀B ∈ A. ¬Finite(B)) ⟶
(∃n ∈ nat. 1≤n ∧ (∃f. ∀B ∈ A. (pairwise_disjoint(f‘B)
∧
sets_of_size_between(f‘B, 2, succ(n)) ∧ ⋃(f‘B)=B)))"

definition
"AC13(m) ≡ ∀A. 0∉A ⟶ (∃f. ∀B ∈ A. f‘B≠0 ∧ f‘B ⊆ B ∧ f‘B ≲
m)"

definition
```
"AC14 ≡ ∃m ∈ nat. 1≤m ∧ AC13(m)"
```

definition
```
"AC15 ≡ ∀A. 0∉A ⟶
                (∃m ∈ nat. 1≤m ∧ (∃f. ∀B ∈ A. f‘B≠0 ∧ f‘B ⊆ B ∧
f‘B ≲ m))"
```

definition
```
"AC16(n, k)  ≡
   ∀A. ¬Finite(A) ⟶
       (∃T. T ⊆ {X ∈ Pow(A). X≈succ(n)} ∧
       (∀X ∈ {X ∈ Pow(A). X≈succ(k)}. ∃! Y. Y ∈ T ∧ X ⊆ Y))"
```

definition
```
"AC17 ≡ ∀A. ∀g ∈ (Pow(A)-{0} -> A) -> Pow(A)-{0}.
                ∃f ∈ Pow(A)-{0} -> A. f‘(g‘f) ∈ g‘f"
```

locale *AC18 =*
assumes *AC18: "A≠0 ∧ (∀a ∈ A. B(a) ≠ 0) ⟶*
((⋂a ∈ A. ⋃b ∈ B(a). X(a,b)) =
(⋃f ∈ ∏a ∈ A. B(a). ⋂a ∈ A. X(a, f‘a)))"
— AC18 cannot be expressed within the object-logic

definition
```
"AC19 ≡ ∀A. A≠0 ∧ 0∉A ⟶ ((⋂a ∈ A. ⋃b ∈ a. b) =
                (⋃f ∈ (∏B ∈ A. B). ⋂a ∈ A. f‘a))"
```

lemma *rvimage_id: "rvimage(A,id(A),r) = r ∩ A*A"*
⟨*proof*⟩

lemma *ordertype_Int:*
*"well_ord(A,r) ⟹ ordertype(A, r ∩ A*A) = ordertype(A,r)"*
⟨*proof*⟩

lemma *lam_sing_bij: "(λx ∈ A. {x}) ∈ bij(A, {{x}. x ∈ A})"*
⟨*proof*⟩

lemma *inj_strengthen_type:*
"⟦f ∈ inj(A, B); ⋀a. a ∈ A ⟹ f‘a ∈ C⟧ ⟹ f ∈ inj(A,C)"
⟨*proof*⟩

lemma *ex1_two_eq:* "⟦∃! x. P(x); P(x); P(y)⟧ ⟹ x=y"
⟨*proof*⟩

lemma *first_in_B:*
"⟦well_ord(⋃(A),r); 0 ∉ A; B ∈ A⟧ ⟹ (THE b. first(b,B,r)) ∈ B"
⟨*proof*⟩

lemma *ex_choice_fun:* "⟦well_ord(⋃(A), R); 0 ∉ A⟧ ⟹ ∃f. f ∈ (∏X ∈ A. X)"
⟨*proof*⟩

lemma *ex_choice_fun_Pow:* "well_ord(A, R) ⟹ ∃f. f ∈ (∏X ∈ Pow(A)-{0}. X)"
⟨*proof*⟩

lemma *lepoll_m_imp_domain_lepoll_m:*
"⟦m ∈ nat; u ≲ m⟧ ⟹ domain(u) ≲ m"
⟨*proof*⟩

lemma *rel_domain_ex1:*
"⟦succ(m) ≲ domain(r); r ≲ succ(m); m ∈ nat⟧ ⟹ function(r)"
⟨*proof*⟩

lemma *rel_is_fun:*
"⟦succ(m) ≲ domain(r); r ≲ succ(m); m ∈ nat;
r ⊆ A*B; A=domain(r)⟧ ⟹ r ∈ A->B"
⟨*proof*⟩

end

theory *Cardinal_aux* **imports** *AC_Equiv* **begin**

lemma *Diff_lepoll:* "⟦A ≲ succ(m); B ⊆ A; B≠0⟧ ⟹ A-B ≲ m"
⟨*proof*⟩

lemma *lepoll_imp_ex_le_eqpoll:*
"⟦A ≲ i; Ord(i)⟧ ⟹ ∃j. j ≤ i ∧ A ≈ j"
⟨*proof*⟩

lemma *lesspoll_imp_ex_lt_eqpoll:*
"⟦A ≺ i; Ord(i)⟧ ⟹ ∃j. j<i ∧ A ≈ j"
⟨*proof*⟩

lemma *Un_eqpoll_Inf_Ord:*
assumes *A:* "A ≈ i" **and** *B:* "B ≈ i" **and** *NFI:* "¬ Finite(i)" **and** *i:* "Ord(i)"
shows "A ∪ B ≈ i"
⟨*proof*⟩

schematic_goal *paired_bij:* "?f ∈ bij({{y,z}. y ∈ x}, x)"
⟨*proof*⟩

lemma *paired_eqpoll:* "{{y,z}. y ∈ x} ≈ x"
⟨*proof*⟩

lemma *ex_eqpoll_disjoint:* "∃B. B ≈ A ∧ B ∩ C = 0"
⟨*proof*⟩

lemma *Un_lepoll_Inf_Ord:*
"⟦A ≲ i; B ≲ i; ¬Finite(i); Ord(i)⟧ ⟹ A ∪ B ≲ i"
⟨*proof*⟩

lemma *Least_in_Ord:* "⟦P(i); i ∈ j; Ord(j)⟧ ⟹ (μ i. P(i)) ∈ j"
⟨*proof*⟩

lemma *Diff_first_lepoll:*
"⟦well_ord(x,r); y ⊆ x; y ≲ succ(n); n ∈ nat⟧
⟹ y - {THE b. first(b,y,r)} ≲ n"
⟨*proof*⟩

lemma *UN_subset_split:*
"$(\bigcup x \in X.\ P(x)) \subseteq (\bigcup x \in X.\ P(x)\text{-}Q(x)) \cup (\bigcup x \in X.\ Q(x))$"
⟨*proof*⟩

lemma *UN_sing_lepoll:* "$Ord(a) \Longrightarrow (\bigcup x \in a.\ \{P(x)\}) \lesssim a$"
⟨*proof*⟩

lemma *UN_fun_lepoll_lemma [rule_format]:*
"$[\![well_ord(T, R);\ \neg Finite(a);\ Ord(a);\ n \in nat]\!]$
$\Longrightarrow \forall f.\ (\forall b \in a.\ f`b \lesssim n \wedge f`b \subseteq T) \longrightarrow (\bigcup b \in a.\ f`b) \lesssim a$"
⟨*proof*⟩

lemma *UN_fun_lepoll:*
"$[\![\forall b \in a.\ f`b \lesssim n \wedge f`b \subseteq T;\ well_ord(T, R);$
$\neg Finite(a);\ Ord(a);\ n \in nat]\!] \Longrightarrow (\bigcup b \in a.\ f`b) \lesssim a$"
⟨*proof*⟩

lemma *UN_lepoll:*
"$[\![\forall b \in a.\ F(b) \lesssim n \wedge F(b) \subseteq T;\ well_ord(T, R);$
$\neg Finite(a);\ Ord(a);\ n \in nat]\!]$
$\Longrightarrow (\bigcup b \in a.\ F(b)) \lesssim a$"
⟨*proof*⟩

lemma *UN_eq_UN_Diffs:*
"$Ord(a) \Longrightarrow (\bigcup b \in a.\ F(b)) = (\bigcup b \in a.\ F(b) - (\bigcup c \in b.\ F(c)))$"
⟨*proof*⟩

lemma *lepoll_imp_eqpoll_subset:*
"$a \lesssim X \Longrightarrow \exists Y.\ Y \subseteq X \wedge a \approx Y$"
⟨*proof*⟩

lemma *Diff_lesspoll_eqpoll_Card_lemma:*
"$[\![A \approx a;\ \neg Finite(a);\ Card(a);\ B \prec a;\ A\text{-}B \prec a]\!] \Longrightarrow P$"
⟨*proof*⟩

lemma *Diff_lesspoll_eqpoll_Card:*
"$[\![A \approx a;\ \neg Finite(a);\ Card(a);\ B \prec a]\!] \Longrightarrow A - B \approx a$"
⟨*proof*⟩

end

theory *WO6_WO1*
imports *Cardinal_aux*
begin

definition
```
  NN  :: "i ⇒ i"  where
    "NN(y) ≡ {m ∈ nat. ∃a. ∃f. Ord(a) ∧ domain(f)=a  ∧
                        (⋃b<a. f‘b) = y ∧ (∀b<a. f‘b ≲ m)}"
```

definition
```
  uu  :: "[i, i, i, i] ⇒ i"  where
    "uu(f, beta, gamma, delta) ≡ (f‘beta * f‘gamma) ∩ f‘delta"
```

definition
```
  vv1 :: "[i, i, i] ⇒ i"  where
     "vv1(f,m,b) ≡
           let g = μ g. (∃d. Ord(d) ∧ (domain(uu(f,b,g,d)) ≠ 0 ∧
                                 domain(uu(f,b,g,d)) ≲ m));
               d = μ d. domain(uu(f,b,g,d)) ≠ 0 ∧
                             domain(uu(f,b,g,d)) ≲ m
           in  if f‘b ≠ 0 then domain(uu(f,b,g,d)) else 0"
```

definition
```
  ww1 :: "[i, i, i] ⇒ i"  where
     "ww1(f,m,b) ≡ f‘b - vv1(f,m,b)"
```

definition
```
  gg1 :: "[i, i, i] ⇒ i"  where
     "gg1(f,a,m) ≡ λb ∈ a++a. if b<a then vv1(f,m,b) else ww1(f,m,b--a)"
```

definition
```
  vv2 :: "[i, i, i, i] ⇒ i"  where
     "vv2(f,b,g,s) ≡
           if f‘g ≠ 0 then {uu(f, b, g, μ d. uu(f,b,g,d) ≠ 0)‘s} else
0"
```

definition
```
  ww2 :: "[i, i, i, i] ⇒ i"  where
     "ww2(f,b,g,s) ≡ f‘g - vv2(f,b,g,s)"
```

definition
```
  gg2 :: "[i, i, i, i] ⇒ i"  where
     "gg2(f,a,b,s) ≡
              λg ∈ a++a. if g<a then vv2(f,b,g,s) else ww2(f,b,g--a,s)"
```

lemma *WO2_WO3: "WO2 ⟹ WO3"*

⟨*proof*⟩

lemma *WO3_WO1: "WO3 ⟹ WO1"*
⟨*proof*⟩

lemma *WO1_WO2: "WO1 ⟹ WO2"*
⟨*proof*⟩

lemma *lam_sets: "f ∈ A->B ⟹ (λx ∈ A. {f‘x}): A -> {{b}. b ∈ B}"*
⟨*proof*⟩

lemma *surj_imp_eq': "f ∈ surj(A,B) ⟹ (⋃a ∈ A. {f‘a}) = B"*
⟨*proof*⟩

lemma *surj_imp_eq: "⟦f ∈ surj(A,B); Ord(A)⟧ ⟹ (⋃a<A. {f‘a}) = B"*
⟨*proof*⟩

lemma *WO1_WO4: "WO1 ⟹ WO4(1)"*
⟨*proof*⟩

lemma *WO4_mono: "⟦m≤n; WO4(m)⟧ ⟹ WO4(n)"*
⟨*proof*⟩

lemma *WO4_WO5: "⟦m ∈ nat; 1≤m; WO4(m)⟧ ⟹ WO5"*
⟨*proof*⟩

lemma *WO5_WO6: "WO5 ⟹ WO6"*
⟨*proof*⟩

lemma *lt_oadd_odiff_disj:*
"⟦k < i++j; Ord(i); Ord(j)⟧
⟹ k < i | (¬ k<i ∧ k = i ++ (k--i) ∧ (k--i)<j)"
⟨*proof*⟩

lemma *domain_uu_subset: "domain(uu(f,b,g,d)) ⊆ f‘b"*
⟨*proof*⟩

lemma *quant_domain_uu_lepoll_m:*
"∀b<a. f‘b ≲ m ⟹ ∀b<a. ∀g<a. ∀d<a. domain(uu(f,b,g,d)) ≲ m"
⟨*proof*⟩

lemma *uu_subset1: "uu(f,b,g,d) ⊆ f‘b * f‘g"*
⟨*proof*⟩

lemma *uu_subset2: "uu(f,b,g,d) ⊆ f‘d"*
⟨*proof*⟩

lemma *uu_lepoll_m: "⟦∀b<a. f‘b ≲ m; d<a⟧ ⟹ uu(f,b,g,d) ≲ m"*
⟨*proof*⟩

lemma *cases:*
"∀b<a. ∀g<a. ∀d<a. u(f,b,g,d) ≲ m
⟹ (∀b<a. f‘b ≠ 0 ⟶
(∃g<a. ∃d<a. u(f,b,g,d) ≠ 0 ∧ u(f,b,g,d) ≺ m))
| (∃b<a. f‘b ≠ 0 ∧ (∀g<a. ∀d<a. u(f,b,g,d) ≠ 0 ⟶
u(f,b,g,d) ≈ m))"
⟨*proof*⟩

lemma *UN_oadd: "Ord(a) ⟹ (⋃b<a++a. C(b)) = (⋃b<a. C(b) ∪ C(a++b))"*
⟨*proof*⟩

lemma *vv1_subset: "vv1(f,m,b) ⊆ f‘b"*
⟨*proof*⟩

lemma *UN_gg1_eq:*
"⟦Ord(a); m ∈ nat⟧ ⟹ (⋃b<a++a. gg1(f,a,m)‘b) = (⋃b<a. f‘b)"
⟨*proof*⟩

lemma *domain_gg1:* "domain(gg1(f,a,m)) = a++a"
⟨*proof*⟩

lemma *nested_LeastI:*
"⟦P(a, b); Ord(a); Ord(b);
Least_a = (μ a. ∃x. Ord(x) ∧ P(a, x))⟧
⟹ P(Least_a, μ b. P(Least_a, b))"
⟨*proof*⟩

lemmas *nested_Least_instance* =
nested_LeastI [of "λg d. domain(uu(f,b,g,d)) ≠ 0 ∧
domain(uu(f,b,g,d)) ≲ m"] **for** f b m

lemma *gg1_lepoll_m:*
"⟦Ord(a); m ∈ nat;
∀b<a. f‘b ≠0 ⟶
(∃g<a. ∃d<a. domain(uu(f,b,g,d)) ≠ 0 ∧
domain(uu(f,b,g,d)) ≲ m);
∀b<a. f‘b ≲ succ(m); b<a++a⟧
⟹ gg1(f,a,m)‘b ≲ m"
⟨*proof*⟩

lemma *ex_d_uu_not_empty:*
"⟦b<a; g<a; f‘b≠0; f‘g≠0;
y*y ⊆ y; (⋃b<a. f‘b)=y⟧
⟹ ∃d<a. uu(f,b,g,d) ≠ 0"
⟨*proof*⟩

lemma *uu_not_empty:*
"⟦b<a; g<a; f‘b≠0; f‘g≠0; y*y ⊆ y; (⋃b<a. f‘b)=y⟧

```
      ⟹ uu(f,b,g,μ d. (uu(f,b,g,d) ≠ 0)) ≠ 0"
```
⟨*proof*⟩

lemma *not_empty_rel_imp_domain:*
```
"⟦r ⊆ A*B; r≠0⟧ ⟹ domain(r)≠0"
```
⟨*proof*⟩

lemma *Least_uu_not_empty_lt_a:*
```
     "⟦b<a; g<a; f‘b≠0; f‘g≠0; y*y ⊆ y; (⋃b<a. f‘b)=y⟧
      ⟹ (μ d. uu(f,b,g,d) ≠ 0) < a"
```
⟨*proof*⟩

lemma *subset_Diff_sing:*
```
"⟦B ⊆ A; a∉B⟧ ⟹ B ⊆ A-{a}"
```
⟨*proof*⟩

lemma *supset_lepoll_imp_eq:*
```
     "⟦A ≲ m; m ≲ B; B ⊆ A; m ∈ nat⟧ ⟹ A=B"
```
⟨*proof*⟩

lemma *uu_Least_is_fun:*
```
     "⟦∀g<a. ∀d<a. domain(uu(f, b, g, d))≠0 ⟶
          domain(uu(f, b, g, d)) ≈ succ(m);
          ∀b<a. f‘b ≲ succ(m);  y*y ⊆ y;
          (⋃b<a. f‘b)=y;  b<a;  g<a;  d<a;
          f‘b≠0;  f‘g≠0;  m ∈ nat;  s ∈ f‘b⟧
      ⟹ uu(f, b, g, μ d. uu(f,b,g,d)≠0) ∈ f‘b -> f‘g"
```
⟨*proof*⟩

lemma *vv2_subset:*
```
     "⟦∀g<a. ∀d<a. domain(uu(f, b, g, d))≠0 ⟶
                      domain(uu(f, b, g, d)) ≈ succ(m);
        ∀b<a. f‘b ≲ succ(m); y*y ⊆ y;
        (⋃b<a. f‘b)=y;  b<a;  g<a;  m ∈ nat;  s ∈ f‘b⟧
      ⟹ vv2(f,b,g,s) ⊆ f‘g"
```
⟨*proof*⟩

lemma *UN_gg2_eq:*
```
     "⟦∀g<a. ∀d<a. domain(uu(f,b,g,d)) ≠ 0 ⟶
              domain(uu(f,b,g,d)) ≈ succ(m);
        ∀b<a. f‘b ≲ succ(m); y*y ⊆ y;
        (⋃b<a. f‘b)=y;  Ord(a);  m ∈ nat;  s ∈ f‘b;  b<a⟧
      ⟹ (⋃g<a++a. gg2(f,a,b,s) ‘ g) = y"
```
⟨*proof*⟩

lemma *domain_gg2:*
```
"domain(gg2(f,a,b,s)) = a++a"
```
⟨*proof*⟩

lemma *vv2_lepoll:* "⟦*m* ∈ *nat*; *m*≠*0*⟧ ⟹ *vv2(f,b,g,s)* ≲ *m*"
⟨*proof*⟩

lemma *ww2_lepoll:*
"⟦∀ *b*<*a*. *f*‘*b* ≲ *succ(m)*; *g*<*a*; *m* ∈ *nat*; *vv2(f,b,g,d)* ⊆ *f*‘*g*⟧
⟹ *ww2(f,b,g,d)* ≲ *m*"
⟨*proof*⟩

lemma *gg2_lepoll_m:*
"⟦∀ *g*<*a*. ∀ *d*<*a*. *domain(uu(f,b,g,d))* ≠ *0* ⟶
domain(uu(f,b,g,d)) ≈ *succ(m)*;
∀ *b*<*a*. *f*‘*b* ≲ *succ(m)*; *y***y* ⊆ *y*;
(⋃ *b*<*a*. *f*‘*b*)=*y*; *b*<*a*; *s* ∈ *f*‘*b*; *m* ∈ *nat*; *m*≠ *0*; *g*<*a*++*a*⟧
⟹ *gg2(f,a,b,s)* ‘ *g* ≲ *m*"
⟨*proof*⟩

lemma *lemma_ii:* "⟦*succ(m)* ∈ *NN(y)*; *y***y* ⊆ *y*; *m* ∈ *nat*; *m*≠*0*⟧ ⟹ *m* ∈ *NN(y)*"
⟨*proof*⟩

lemma *z_n_subset_z_succ_n:*
"∀ *n* ∈ *nat*. *rec(n, x, λk r. r* ∪ *r***r) ⊆ rec(succ(n), x, λk r. r* ∪ *r***r)*"
⟨*proof*⟩

lemma *le_subsets:*
"⟦∀ *n* ∈ *nat*. *f(n)*<=*f(succ(n))*; *n*≤*m*; *n* ∈ *nat*; *m* ∈ *nat*⟧
⟹ *f(n)*<=*f(m)*"
⟨*proof*⟩

lemma *le_imp_rec_subset:*

```
"⟦n≤m; m ∈ nat⟧
 ⟹ rec(n, x, λk r. r ∪ r*r) ⊆ rec(m, x, λk r. r ∪ r*r)"
```
⟨*proof*⟩

lemma *lemma_iv*: `"∃y. x ∪ y*y ⊆ y"`
⟨*proof*⟩

lemma *WO6_imp_NN_not_empty*: `"WO6 ⟹ NN(y) ≠ 0"`
⟨*proof*⟩

lemma *lemma1*:
```
"⟦(⋃b<a. f‘b)=y; x ∈ y; ∀b<a. f‘b ≲ 1; Ord(a)⟧ ⟹ ∃c<a. f‘c = {x}"
```
⟨*proof*⟩

lemma *lemma2*:
```
"⟦(⋃b<a. f‘b)=y; x ∈ y; ∀b<a. f‘b ≲ 1; Ord(a)⟧
 ⟹ f‘ (μ i. f‘i = {x}) = {x}"
```
⟨*proof*⟩

lemma *NN_imp_ex_inj*: `"1 ∈ NN(y) ⟹ ∃a f. Ord(a) ∧ f ∈ inj(y, a)"`
⟨*proof*⟩

lemma *y_well_ord*: `"⟦y*y ⊆ y; 1 ∈ NN(y)⟧ ⟹ ∃r. well_ord(y, r)"`
⟨*proof*⟩

lemma *rev_induct_lemma [rule_format]:*
"⟦n ∈ nat; ⋀m. ⟦m ∈ nat; m≠0; P(succ(m))⟧ ⟹ P(m)⟧
⟹ n≠0 ⟶ P(n) ⟶ P(1)"
⟨*proof*⟩

lemma *rev_induct:*
"⟦n ∈ nat; P(n); n≠0;
⋀m. ⟦m ∈ nat; m≠0; P(succ(m))⟧ ⟹ P(m)⟧
⟹ P(1)"
⟨*proof*⟩

lemma *NN_into_nat:* "n ∈ NN(y) ⟹ n ∈ nat"
⟨*proof*⟩

lemma *lemma3:* "⟦n ∈ NN(y); y*y ⊆ y; n≠0⟧ ⟹ 1 ∈ NN(y)"
⟨*proof*⟩

lemma *NN_y_0:* "0 ∈ NN(y) ⟹ y=0"
⟨*proof*⟩

lemma *WO6_imp_WO1:* "WO6 ⟹ WO1"
⟨*proof*⟩

end

theory *WO1_WO7*
imports *AC_Equiv*
begin

definition
"LEMMA ≡
∀X. ¬Finite(X) ⟶ (∃R. well_ord(X,R) ∧ ¬well_ord(X,converse(R)))"

lemma *WO7_iff_LEMMA:* "WO7 ⟷ LEMMA"
⟨*proof*⟩

lemma *LEMMA_imp_WO1: "LEMMA ⟹ WO1"*
⟨*proof*⟩

lemma *converse_Memrel_not_wf_on:*
"⟦Ord(a); ¬Finite(a)⟧ ⟹ ¬wf[a](converse(Memrel(a)))"
⟨*proof*⟩

lemma *converse_Memrel_not_well_ord:*
"⟦Ord(a); ¬Finite(a)⟧ ⟹ ¬well_ord(a,converse(Memrel(a)))"
⟨*proof*⟩

lemma *well_ord_rvimage_ordertype:*
"well_ord(A,r) ⟹
rvimage (ordertype(A,r), converse(ordermap(A,r)),r) =
Memrel(ordertype(A,r))"
⟨*proof*⟩

lemma *well_ord_converse_Memrel:*
"⟦well_ord(A,r); well_ord(A,converse(r))⟧
⟹ well_ord(ordertype(A,r), converse(Memrel(ordertype(A,r))))"

⟨*proof*⟩

lemma *WO1_imp_LEMMA: "WO1 ⟹ LEMMA"*
⟨*proof*⟩

lemma *WO1_iff_WO7: "WO1 ⟷ WO7"*
⟨*proof*⟩

lemma *WO1_WO8: "WO1 ⟹ WO8"*
⟨*proof*⟩

lemma *WO8_WO1: "WO8 ⟹ WO1"*
⟨*proof*⟩

end

theory *AC7_AC9*
imports *AC_Equiv*
begin

lemma *Sigma_fun_space_not0: "⟦0∉A; B ∈ A⟧ ⟹ (nat->⋃(A)) * B ≠ 0"*
⟨*proof*⟩

lemma *inj_lemma:*
*"C ∈ A ⟹ (λg ∈ (nat->⋃(A))*C.*
(λn ∈ nat. if(n=0, snd(g), fst(g)`(n #- 1))))
*∈ inj((nat->⋃(A))*C, (nat->⋃(A))) "*
⟨*proof*⟩

lemma *Sigma_fun_space_eqpoll:*
*"⟦C ∈ A; 0∉A⟧ ⟹ (nat->⋃(A)) * C ≈ (nat->⋃(A))"*
⟨*proof*⟩

lemma *AC6_AC7: "AC6 ⟹ AC7"*
⟨*proof*⟩

lemma *lemma1_1: "y ∈ (∏B ∈ A. Y*B) ⟹ (λB ∈ A. snd(y`B)) ∈ (∏B ∈*

```
A. B)"
```
⟨*proof*⟩

lemma *lemma1_2:*
```
     "y ∈ (∏ B ∈ {Y*C. C ∈ A}. B) ⟹ (λB ∈ A. y‘(Y*B)) ∈ (∏ B ∈ A.
Y*B)"
```
⟨*proof*⟩

lemma *AC7_AC6_lemma1:*
```
     "(∏ B ∈ {(nat->⋃(A))*C. C ∈ A}. B) ≠ 0 ⟹ (∏ B ∈ A. B) ≠ 0"
```
⟨*proof*⟩

lemma *AC7_AC6_lemma2:* "0 ∉ A ⟹ 0 ∉ {(nat -> ⋃(A)) * C. C ∈ A}"
⟨*proof*⟩

lemma *AC7_AC6:* "AC7 ⟹ AC6"
⟨*proof*⟩

lemma *AC1_AC8_lemma1:*
```
        "∀B ∈ A. ∃B1 B2. B=⟨B1,B2⟩ ∧ B1 ≈ B2
        ⟹ 0 ∉ { bij(fst(B),snd(B)). B ∈ A }"
```
⟨*proof*⟩

lemma *AC1_AC8_lemma2:*
```
     "⟦f ∈ (∏ X ∈ RepFun(A,p). X); D ∈ A⟧ ⟹ (λx ∈ A. f‘p(x))‘D ∈
p(D)"
```
⟨*proof*⟩

lemma *AC1_AC8:* "AC1 ⟹ AC8"
⟨*proof*⟩

lemma *AC8_AC9_lemma:*
```
     "∀B1 ∈ A. ∀B2 ∈ A. B1 ≈ B2
      ⟹ ∀B ∈ A*A. ∃B1 B2. B=⟨B1,B2⟩ ∧ B1 ≈ B2"
```
⟨*proof*⟩

lemma *AC8_AC9:* "AC8 ⟹ AC9"

⟨*proof*⟩

lemma *snd_lepoll_SigmaI: "b ∈ B ⟹ X ≲ B × X"*
⟨*proof*⟩

lemma *nat_lepoll_lemma:*
"⟦0 ∉ A; B ∈ A⟧ ⟹ nat ≲ ((nat → ⋃(A)) × B) × nat"
⟨*proof*⟩

lemma *AC9_AC1_lemma1:*
"⟦0∉A; A≠0;
*C = {((nat->⋃(A))*B)*nat. B ∈ A} ∪*
*{cons(0,((nat->⋃(A))*B)*nat). B ∈ A};*
B1 ∈ C; B2 ∈ C⟧
⟹ B1 ≈ B2"
⟨*proof*⟩

lemma *AC9_AC1_lemma2:*
*"∀B1 ∈ {(F*B)*N. B ∈ A} ∪ {cons(0,(F*B)*N). B ∈ A}.*
*∀B2 ∈ {(F*B)*N. B ∈ A} ∪ {cons(0,(F*B)*N). B ∈ A}.*
f‘⟨B1,B2⟩ ∈ bij(B1, B2)
*⟹ (λB ∈ A. snd(fst((f‘<cons(0,(F*B)*N),(F*B)*N>)‘0))) ∈ (∏X*
∈ A. X)"
⟨*proof*⟩

lemma *AC9_AC1: "AC9 ⟹ AC1"*
⟨*proof*⟩

end

theory *WO1_AC*
imports *AC_Equiv*
begin

theorem *WO1_AC1: "WO1 ⟹ AC1"*

⟨*proof*⟩

lemma *lemma1:* "⟦*WO1*; ∀*B* ∈ *A*. ∃*C* ∈ *D*(*B*). *P*(*C*,*B*)⟧ ⟹ ∃*f*. ∀*B* ∈ *A*. *P*(*f*‘*B*,*B*)"
⟨*proof*⟩

lemma *lemma2_1:* "⟦¬*Finite*(*B*); *WO1*⟧ ⟹ |*B*| + |*B*| ≈ *B*"
⟨*proof*⟩

lemma *lemma2_2:*
"*f* ∈ *bij*(*D*+*D*, *B*) ⟹ {{*f*‘*Inl*(*i*), *f*‘*Inr*(*i*)}. *i* ∈ *D*} ∈ *Pow*(*Pow*(*B*))"
⟨*proof*⟩

lemma *lemma2_3:*
"*f* ∈ *bij*(*D*+*D*, *B*) ⟹ *pairwise_disjoint*({{*f*‘*Inl*(*i*), *f*‘*Inr*(*i*)}.
i ∈ *D*})"
⟨*proof*⟩

lemma *lemma2_4:*
"⟦*f* ∈ *bij*(*D*+*D*, *B*); 1≤*n*⟧
⟹ *sets_of_size_between*({{*f*‘*Inl*(*i*), *f*‘*Inr*(*i*)}. *i* ∈ *D*}, 2, *succ*(*n*))"
⟨*proof*⟩

lemma *lemma2_5:*
"*f* ∈ *bij*(*D*+*D*, *B*) ⟹ ⋃({{*f*‘*Inl*(*i*), *f*‘*Inr*(*i*)}. *i* ∈ *D*})=*B*"
⟨*proof*⟩

lemma *lemma2:*
"⟦*WO1*; ¬*Finite*(*B*); 1≤*n*⟧
⟹ ∃*C* ∈ *Pow*(*Pow*(*B*)). *pairwise_disjoint*(*C*) ∧
sets_of_size_between(*C*, 2, *succ*(*n*)) ∧
⋃(*C*)=*B*"
⟨*proof*⟩

theorem *WO1_AC10:* "⟦*WO1*; 1≤*n*⟧ ⟹ *AC10*(*n*)"
⟨*proof*⟩

end

theory *Hartog*
imports *AC_Equiv*
begin

definition

```
  Hartog :: "i ⇒ i"  where
   "Hartog(X) ≡ μ i. ¬ i ≲ X"

lemma Ords_in_set: "∀a. Ord(a) ⟶ a ∈ X ⟹ P"
⟨proof⟩

lemma Ord_lepoll_imp_ex_well_ord:
     "⟦Ord(a); a ≲ X⟧
      ⟹ ∃Y. Y ⊆ X ∧ (∃R. well_ord(Y,R) ∧ ordertype(Y,R)=a)"
  ⟨proof⟩

lemma Ord_lepoll_imp_eq_ordertype:
     "⟦Ord(a); a ≲ X⟧ ⟹ ∃Y. Y ⊆ X ∧ (∃R. R ⊆ X*X ∧ ordertype(Y,R)=a)"
⟨proof⟩

lemma Ords_lepoll_set_lemma:
     "(∀a. Ord(a) ⟶ a ≲ X) ⟹
       ∀a. Ord(a) ⟶
        a ∈ {b. Z ∈ Pow(X)*Pow(X*X), ∃Y R. Z=⟨Y,R⟩ ∧ ordertype(Y,R)=b}"
⟨proof⟩

lemma Ords_lepoll_set: "∀a. Ord(a) ⟶ a ≲ X ⟹ P"
⟨proof⟩

lemma ex_Ord_not_lepoll: "∃a. Ord(a) ∧ ¬a ≲ X"
⟨proof⟩

lemma not_Hartog_lepoll_self: "¬ Hartog(A) ≲ A"
  ⟨proof⟩

lemmas Hartog_lepoll_selfE = not_Hartog_lepoll_self [THEN notE]

lemma Ord_Hartog: "Ord(Hartog(A))"
⟨proof⟩

lemma less_HartogE1: "⟦i < Hartog(A); ¬ i ≲ A⟧ ⟹ P"
⟨proof⟩

lemma less_HartogE: "⟦i < Hartog(A); i ≈ Hartog(A)⟧ ⟹ P"
⟨proof⟩

lemma Card_Hartog: "Card(Hartog(A))"
⟨proof⟩

end


theory HH
imports AC_Equiv Hartog
```

begin

definition
  HH :: "[i, i, i] ⇒ i" **where**
    "HH(f,x,a) ≡ transrec(a, λb r. let z = x - (⋃c ∈ b. r‘c)
                                    in if f‘z ∈ Pow(z)-{0} then f‘z else
{x})"

0.1 Lemmas useful in each of the three proofs

lemma *HH_def_satisfies_eq:*
     "HH(f,x,a) = (let z = x - (⋃b ∈ a. HH(f,x,b))
                  in if f‘z ∈ Pow(z)-{0} then f‘z else {x})"
⟨*proof*⟩

lemma *HH_values: "HH(f,x,a) ∈ Pow(x)-{0} | HH(f,x,a)={x}"*
⟨*proof*⟩

lemma *subset_imp_Diff_eq:*
     "B ⊆ A ⟹ X-(⋃a ∈ A. P(a)) = X-(⋃a ∈ A-B. P(a))-(⋃b ∈ B. P(b))"
⟨*proof*⟩

lemma *Ord_DiffE: "⟦c ∈ a-b; b<a⟧ ⟹ c=b | b<c ∧ c<a"*
⟨*proof*⟩

lemma *Diff_UN_eq_self: "(⋀y. y∈A ⟹ P(y) = {x}) ⟹ x - (⋃y ∈ A.*
P(y)) = x"
⟨*proof*⟩

lemma *HH_eq: "x - (⋃b ∈ a. HH(f,x,b)) = x - (⋃b ∈ a1. HH(f,x,b))*
              ⟹ HH(f,x,a) = HH(f,x,a1)"
⟨*proof*⟩

lemma *HH_is_x_gt_too: "⟦HH(f,x,b)={x}; b<a⟧ ⟹ HH(f,x,a)={x}"*
⟨*proof*⟩

lemma *HH_subset_x_lt_too:*
     "⟦HH(f,x,a) ∈ Pow(x)-{0}; b<a⟧ ⟹ HH(f,x,b) ∈ Pow(x)-{0}"
⟨*proof*⟩

lemma *HH_subset_x_imp_subset_Diff_UN:*
    "HH(f,x,a) ∈ Pow(x)-{0} ⟹ HH(f,x,a) ∈ Pow(x - (⋃b ∈ a. HH(f,x,b)))-{0}"
⟨*proof*⟩

lemma *HH_eq_arg_lt:*
     "⟦HH(f,x,v)=HH(f,x,w); HH(f,x,v) ∈ Pow(x)-{0}; v ∈ w⟧ ⟹ P"
⟨*proof*⟩

lemma *HH_eq_imp_arg_eq:*

"⟦HH(f,x,v)=HH(f,x,w); HH(f,x,w) ∈ Pow(x)-{0}; Ord(v); Ord(w)⟧ ⟹ v=w"
⟨*proof*⟩

lemma *HH_subset_x_imp_lepoll:*
"⟦HH(f, x, i) ∈ Pow(x)-{0}; Ord(i)⟧ ⟹ i ≲ Pow(x)-{0}"
⟨*proof*⟩

lemma *HH_Hartog_is_x:* "HH(f, x, Hartog(Pow(x)-{0})) = {x}"
⟨*proof*⟩

lemma *HH_Least_eq_x:* "HH(f, x, μ i. HH(f, x, i) = {x}) = {x}"
⟨*proof*⟩

lemma *less_Least_subset_x:*
"a ∈ (μ i. HH(f,x,i)={x}) ⟹ HH(f,x,a) ∈ Pow(x)-{0}"
⟨*proof*⟩

0.2 Lemmas used in the proofs of *AC1* ⟹ *WO2* and *AC17* ⟹ *AC1*

lemma *lam_Least_HH_inj_Pow:*
"(λa ∈ (μ i. HH(f,x,i)={x}). HH(f,x,a))
∈ inj(μ i. HH(f,x,i)={x}, Pow(x)-{0})"
⟨*proof*⟩

lemma *lam_Least_HH_inj:*
"∀a ∈ (μ i. HH(f,x,i)={x}). ∃z ∈ x. HH(f,x,a) = {z}
⟹ (λa ∈ (μ i. HH(f,x,i)={x}). HH(f,x,a))
∈ inj(μ i. HH(f,x,i)={x}, {{y}. y ∈ x})"
⟨*proof*⟩

lemma *lam_surj_sing:*
"⟦x - (⋃a ∈ A. F(a)) = 0; ∀a ∈ A. ∃z ∈ x. F(a) = {z}⟧
⟹ (λa ∈ A. F(a)) ∈ surj(A, {{y}. y ∈ x})"
⟨*proof*⟩

lemma *not_emptyI2:* "y ∈ Pow(x)-{0} ⟹ x ≠ 0"
⟨*proof*⟩

lemma *f_subset_imp_HH_subset:*
"f‘(x - (⋃j ∈ i. HH(f,x,j))) ∈ Pow(x - (⋃j ∈ i. HH(f,x,j)))-{0}

⟹ HH(f, x, i) ∈ Pow(x) - {0}"
⟨*proof*⟩

lemma *f_subsets_imp_UN_HH_eq_x:*
"∀z ∈ Pow(x)-{0}. f‘z ∈ Pow(z)-{0}
⟹ x - (⋃j ∈ (μ i. HH(f,x,i)={x}). HH(f,x,j)) = 0"
⟨*proof*⟩

lemma *HH_values2: "HH(f,x,i) = f‘(x - (⋃ j ∈ i. HH(f,x,j))) | HH(f,x,i)={x}"*
⟨*proof*⟩

lemma *HH_subset_imp_eq:*
"HH(f,x,i): Pow(x)-{0} ⟹ HH(f,x,i)=f‘(x - (⋃ j ∈ i. HH(f,x,j)))"
⟨*proof*⟩

lemma *f_sing_imp_HH_sing:*
"⟦f ∈ (Pow(x)-{0}) -> {{z}. z ∈ x};
a ∈ (μ i. HH(f,x,i)={x})⟧ ⟹ ∃z ∈ x. HH(f,x,a) = {z}"
⟨*proof*⟩

lemma *f_sing_lam_bij:*
"⟦x - (⋃ j ∈ (μ i. HH(f,x,i)={x}). HH(f,x,j)) = 0;
f ∈ (Pow(x)-{0}) -> {{z}. z ∈ x}⟧
⟹ (λa ∈ (μ i. HH(f,x,i)={x}). HH(f,x,a))
∈ bij(μ i. HH(f,x,i)={x}, {{y}. y ∈ x})"
⟨*proof*⟩

lemma *lam_singI:*
"f ∈ (∏ X ∈ Pow(x)-{0}. F(X))
⟹ (λX ∈ Pow(x)-{0}. {f‘X}) ∈ (∏ X ∈ Pow(x)-{0}. {{z}. z ∈ F(X)})"
⟨*proof*⟩

lemmas *bij_Least_HH_x =*
comp_bij [OF f_sing_lam_bij [OF _ lam_singI]
lam_sing_bij [THEN bij_converse_bij]]

0.3 The proof of *AC1 ⟹ WO2*

lemma *bijection:*
"f ∈ (∏ X ∈ Pow(x) - {0}. X)
⟹ ∃g. g ∈ bij(x, μ i. HH(λX ∈ Pow(x)-{0}. {f‘X}, x, i) = {x})"
⟨*proof*⟩

lemma *AC1_WO2: "AC1 ⟹ WO2"*
⟨*proof*⟩

end

theory *AC15_WO6*
imports *HH Cardinal_aux*
begin

lemma *lepoll_Sigma:* "A≠0 ⟹ B ≲ A*B"
⟨*proof*⟩

lemma *cons_times_nat_not_Finite:*
"0∉A ⟹ ∀B ∈ {cons(0,x*nat). x ∈ A}. ¬Finite(B)"
⟨*proof*⟩

lemma *lemma1:* "⟦⋃(C)=A; a ∈ A⟧ ⟹ ∃B ∈ C. a ∈ B ∧ B ⊆ A"
⟨*proof*⟩

lemma *lemma2:*
"⟦pairwise_disjoint(A); B ∈ A; C ∈ A; a ∈ B; a ∈ C⟧ ⟹ B=C"
⟨*proof*⟩

lemma *lemma3:*
"∀B ∈ {cons(0, x*nat). x ∈ A}. pairwise_disjoint(f‘B) ∧
sets_of_size_between(f‘B, 2, n) ∧ ⋃(f‘B)=B
⟹ ∀B ∈ A. ∃! u. u ∈ f‘cons(0, B*nat) ∧ u ⊆ cons(0, B*nat) ∧

0 ∈ u ∧ 2 ≲ u ∧ u ≲ n"
⟨*proof*⟩

lemma *lemma4:* "⟦A ≲ i; Ord(i)⟧ ⟹ {P(a). a ∈ A} ≲ i"
⟨*proof*⟩

lemma *lemma5_1:*
"⟦B ∈ A; 2 ≲ u(B)⟧ ⟹ (λx ∈ A. {fst(x). x ∈ u(x)-{0}})‘B ≠ 0"
⟨*proof*⟩

lemma *lemma5_2:*
"⟦B ∈ A; u(B) ⊆ cons(0, B*nat)⟧
⟹ (λx ∈ A. {fst(x). x ∈ u(x)-{0}})‘B ⊆ B"
⟨*proof*⟩

lemma *lemma5_3:*
"⟦n ∈ nat; B ∈ A; 0 ∈ u(B); u(B) ≲ succ(n)⟧
⟹ (λx ∈ A. {fst(x). x ∈ u(x)-{0}})‘B ≲ n"
⟨*proof*⟩

lemma *ex_fun_AC13_AC15:*
"⟦∀B ∈ {cons(0, x*nat). x ∈ A}.
pairwise_disjoint(f‘B) ∧
sets_of_size_between(f‘B, 2, succ(n)) ∧ ⋃(f‘B)=B;
n ∈ nat⟧

$\Longrightarrow \exists f.\ \forall B \in A.\ f`B \neq 0 \wedge f`B \subseteq B \wedge f`B \lesssim n"$
⟨*proof*⟩

theorem *AC10_AC11:* "⟦$n \in nat$; $1 \leq n$; *AC10(n)*⟧ $\Longrightarrow$ *AC11*"
⟨*proof*⟩

theorem *AC11_AC12:* "*AC11* $\Longrightarrow$ *AC12*"
⟨*proof*⟩

theorem *AC12_AC15:* "*AC12* $\Longrightarrow$ *AC15*"
⟨*proof*⟩

lemma *OUN_eq_UN:* "*Ord(x)* $\Longrightarrow$ $(\bigcup a<x.\ F(a)) = (\bigcup a \in x.\ F(a))$"
⟨*proof*⟩

lemma *AC15_WO6_aux1:*
"$\forall x \in Pow(A)-\{0\}.\ f`x \neq 0 \wedge f`x \subseteq x \wedge f`x \lesssim m$
$\Longrightarrow (\bigcup i<\mu\ x.\ HH(f,A,x)=\{A\}.\ HH(f,A,i)) = A$"
⟨*proof*⟩

lemma *AC15_WO6_aux2:*
"$\forall x \in Pow(A)-\{0\}.\ f`x \neq 0 \wedge f`x \subseteq x \wedge f`x \lesssim m$
$\Longrightarrow \forall x < (\mu\ x.\ HH(f,A,x)=\{A\}).\ HH(f,A,x) \lesssim m$"
⟨*proof*⟩

theorem *AC15_WO6:* "*AC15* $\Longrightarrow$ *WO6*"
⟨*proof*⟩

theorem *AC10_AC13:* "⟦*n* ∈ *nat*; 1≤*n*; *AC10(n)*⟧ ⟹ *AC13(n)*"
⟨*proof*⟩

lemma *AC1_AC13:* "*AC1* ⟹ *AC13(1)*"
⟨*proof*⟩

lemma *AC13_mono:* "⟦*m*≤*n*; *AC13(m)*⟧ ⟹ *AC13(n)*"
⟨*proof*⟩

theorem *AC13_AC14:* "⟦*n* ∈ *nat*; 1≤*n*; *AC13(n)*⟧ ⟹ *AC14*"
⟨*proof*⟩

theorem *AC14_AC15: "AC14 ⟹ AC15"*
⟨*proof*⟩

lemma *lemma_aux: "⟦A≠0; A ≲ 1⟧ ⟹ ∃a. A={a}"*
⟨*proof*⟩

lemma *AC13_AC1_lemma:*
"∀B ∈ A. f(B)≠0 ∧ f(B)<=B ∧ f(B) ≲ 1
⟹ (λx ∈ A. THE y. f(x)={y}) ∈ (∏ X ∈ A. X)"
⟨*proof*⟩

theorem *AC13_AC1: "AC13(1) ⟹ AC1"*
⟨*proof*⟩

theorem *AC11_AC14: "AC11 ⟹ AC14"*
⟨*proof*⟩

end

theory *AC16_lemmas*
imports *AC_Equiv Hartog Cardinal_aux*
begin

lemma *cons_Diff_eq: "a∉A ⟹ cons(a,A)-{a}=A"*
⟨*proof*⟩

lemma *nat_1_lepoll_iff: "1≲X ⟷ (∃x. x ∈ X)"*
⟨*proof*⟩

lemma *eqpoll_1_iff_singleton: "X≈1 ⟷ (∃x. X={x})"*
⟨*proof*⟩

lemma *cons_eqpoll_succ: "⟦x≈n; y∉x⟧ ⟹ cons(y,x)≈succ(n)"*
⟨*proof*⟩

lemma *subsets_eqpoll_1_eq: "{Y ∈ Pow(X). Y≈1} = {{x}. x ∈ X}"*

⟨*proof*⟩

lemma *eqpoll_RepFun_sing:* "X≈{{x}. x ∈ X}"
⟨*proof*⟩

lemma *subsets_eqpoll_1_eqpoll:* "{Y ∈ Pow(X). Y≈1}≈X"
⟨*proof*⟩

lemma *InfCard_Least_in:*
"⟦InfCard(x); y ⊆ x; y ≈ succ(z)⟧ ⟹ (μ i. i ∈ y) ∈ y"
⟨*proof*⟩

lemma *subsets_lepoll_lemma1:*
"⟦InfCard(x); n ∈ nat⟧
⟹ {y ∈ Pow(x). y≈succ(succ(n))} ≲ x*{y ∈ Pow(x). y≈succ(n)}"
⟨*proof*⟩

lemma *set_of_Ord_succ_Union:* "(∀y ∈ z. Ord(y)) ⟹ z ⊆ succ(⋃(z))"
⟨*proof*⟩

lemma *subset_not_mem:* "j ⊆ i ⟹ i ∉ j"
⟨*proof*⟩

lemma *succ_Union_not_mem:*
"(⋀y. y ∈ z ⟹ Ord(y)) ⟹ succ(⋃(z)) ∉ z"
⟨*proof*⟩

lemma *Union_cons_eq_succ_Union:*
"⋃(cons(succ(⋃(z)),z)) = succ(⋃(z))"
⟨*proof*⟩

lemma *Un_Ord_disj:* "⟦Ord(i); Ord(j)⟧ ⟹ i ∪ j = i | i ∪ j = j"
⟨*proof*⟩

lemma *Union_eq_Un:* "x ∈ X ⟹ ⋃(X) = x ∪ ⋃(X-{x})"
⟨*proof*⟩

lemma *Union_in_lemma [rule_format]:*
"n ∈ nat ⟹ ∀z. (∀y ∈ z. Ord(y)) ∧ z≈n ∧ z≠0 ⟶ ⋃(z) ∈ z"
⟨*proof*⟩

lemma *Union_in:* "⟦∀x ∈ z. Ord(x); z≈n; z≠0; n ∈ nat⟧ ⟹ ⋃(z) ∈ z"
⟨*proof*⟩

lemma *succ_Union_in_x:*
"⟦InfCard(x); z ∈ Pow(x); z≈n; n ∈ nat⟧ ⟹ succ(⋃(z)) ∈ x"
⟨*proof*⟩

lemma *succ_lepoll_succ_succ:*

"⟦InfCard(x); n ∈ nat⟧
⟹ {y ∈ Pow(x). y≈succ(n)} ≲ {y ∈ Pow(x). y≈succ(succ(n))}"
⟨proof⟩

lemma *subsets_eqpoll_X:*
"⟦InfCard(X); n ∈ nat⟧ ⟹ {Y ∈ Pow(X). Y≈succ(n)} ≈ X"
⟨proof⟩

lemma *image_vimage_eq:*
"⟦f ∈ surj(A,B); y ⊆ B⟧ ⟹ f``(converse(f)``y) = y"
⟨proof⟩

lemma *vimage_image_eq:* "⟦f ∈ inj(A,B); y ⊆ A⟧ ⟹ converse(f)``(f``y)
= y"
⟨proof⟩

lemma *subsets_eqpoll:*
"A≈B ⟹ {Y ∈ Pow(A). Y≈n}≈{Y ∈ Pow(B). Y≈n}"
⟨proof⟩

lemma *WO2_imp_ex_Card:* "WO2 ⟹ ∃a. Card(a) ∧ X≈a"
⟨proof⟩

lemma *lepoll_infinite:* "⟦X≲Y; ¬Finite(X)⟧ ⟹ ¬Finite(Y)"
⟨proof⟩

lemma *infinite_Card_is_InfCard:* "⟦¬Finite(X); Card(X)⟧ ⟹ InfCard(X)"
⟨proof⟩

lemma *WO2_infinite_subsets_eqpoll_X:* "⟦WO2; n ∈ nat; ¬Finite(X)⟧
⟹ {Y ∈ Pow(X). Y≈succ(n)}≈X"
⟨proof⟩

lemma *well_ord_imp_ex_Card:* "well_ord(X,R) ⟹ ∃a. Card(a) ∧ X≈a"
⟨proof⟩

lemma *well_ord_infinite_subsets_eqpoll_X:*
"⟦well_ord(X,R); n ∈ nat; ¬Finite(X)⟧ ⟹ {Y ∈ Pow(X). Y≈succ(n)}≈X"
⟨proof⟩

end

theory *WO2_AC16* **imports** *AC_Equiv AC16_lemmas Cardinal_aux* **begin**

definition
recfunAC16 :: "[i,i,i,i] ⇒ i" **where**

```
"recfunAC16(f,h,i,a) ≡
     transrec2(i, 0,
          λg r. if (∃y ∈ r. h‘g ⊆ y) then r
                else r ∪ {f‘(μ i. h‘g ⊆ f‘i ∧
                     (∀b<a. (h‘b ⊆ f‘i ⟶ (∀t ∈ r. ¬ h‘b ⊆ t))))})"
```

lemma *recfunAC16_0: "recfunAC16(f,h,0,a) = 0"*
⟨*proof*⟩

lemma *recfunAC16_succ:*
```
"recfunAC16(f,h,succ(i),a) =
 (if (∃y ∈ recfunAC16(f,h,i,a). h ‘ i ⊆ y) then recfunAC16(f,h,i,a)

  else recfunAC16(f,h,i,a) ∪
       {f ‘ (μ j. h ‘ i ⊆ f ‘ j ∧
        (∀b<a. (h‘b ⊆ f‘j
         ⟶ (∀t ∈ recfunAC16(f,h,i,a). ¬ h‘b ⊆ t))))})"
```
⟨*proof*⟩

lemma *recfunAC16_Limit: "Limit(i)*
```
    ⟹ recfunAC16(f,h,i,a) = (⋃j<i. recfunAC16(f,h,j,a))"
```
⟨*proof*⟩

lemma *transrec2_mono_lemma [rule_format]:*
```
"⟦⋀g r. r ⊆ B(g,r);  Ord(i)⟧
 ⟹ j<i ⟶ transrec2(j, 0, B) ⊆ transrec2(i, 0, B)"
```
⟨*proof*⟩

lemma *transrec2_mono:*
```
"⟦⋀g r. r ⊆ B(g,r); j≤i⟧
 ⟹ transrec2(j, 0, B) ⊆ transrec2(i, 0, B)"
```
⟨*proof*⟩

lemma *recfunAC16_mono:*
```
"i≤j ⟹ recfunAC16(f, g, i, a) ⊆ recfunAC16(f, g, j, a)"
```
⟨*proof*⟩

lemma *lemma3_1:*

```
    "⟦∀y<x. ∀z<a. z<y | (∃Y ∈ F(y). f(z)<=Y) ⟶ (∃! Y. Y ∈ F(y) ∧
f(z)<=Y);
        ∀i j. i≤j ⟶ F(i) ⊆ F(j); j≤i; i<x; z<a;
        V ∈ F(i); f(z)<=V; W ∈ F(j); f(z)<=W⟧
     ⟹ V = W"
```

⟨*proof*⟩

lemma *lemma3:*

```
    "⟦∀y<x. ∀z<a. z<y | (∃Y ∈ F(y). f(z)<=Y) ⟶ (∃! Y. Y ∈ F(y) ∧
f(z)<=Y);
        ∀i j. i≤j ⟶ F(i) ⊆ F(j); i<x; j<x; z<a;
        V ∈ F(i); f(z)<=V; W ∈ F(j); f(z)<=W⟧
     ⟹ V = W"
```

⟨*proof*⟩

lemma *lemma4:*

```
     "⟦∀y<x. F(y) ⊆ X ∧
                (∀x<a. x < y | (∃Y ∈ F(y). h(x) ⊆ Y) ⟶
                 (∃! Y. Y ∈ F(y) ∧ h(x) ⊆ Y));
         x < a⟧
      ⟹ ∀y<x. ∀z<a. z < y | (∃Y ∈ F(y). h(z) ⊆ Y) ⟶
                       (∃! Y. Y ∈ F(y) ∧ h(z) ⊆ Y)"
```

⟨*proof*⟩

lemma *lemma5:*

```
     "⟦∀y<x. F(y) ⊆ X ∧
                (∀x<a. x < y | (∃Y ∈ F(y). h(x) ⊆ Y) ⟶
                 (∃! Y. Y ∈ F(y) ∧ h(x) ⊆ Y));
         x < a; Limit(x); ∀i j. i≤j ⟶ F(i) ⊆ F(j)⟧
      ⟹ (⋃x<x. F(x)) ⊆ X ∧
          (∀xa<a. xa < x | (∃x ∈ ⋃x<x. F(x). h(xa) ⊆ x)
                ⟶ (∃! Y. Y ∈ (⋃x<x. F(x)) ∧ h(xa) ⊆ Y))"
```

⟨*proof*⟩

lemma *dbl_Diff_eqpoll_Card:*
"⟦A≈a; Card(a); ¬Finite(a); B≺a; C≺a⟧ ⟹ A - B - C≈a"
⟨*proof*⟩

lemma *Finite_lesspoll_infinite_Ord:*
"⟦Finite(X); ¬Finite(a); Ord(a)⟧ ⟹ X≺a"
⟨*proof*⟩

lemma *Union_lesspoll:*
"⟦∀x ∈ X. x ≲ n ∧ x ⊆ T; well_ord(T, R); X ≲ b;
b<a; ¬Finite(a); Card(a); n ∈ nat⟧
⟹ ⋃(X)≺a"
⟨*proof*⟩

lemma *Un_sing_eq_cons:* "A ∪ {a} = cons(a, A)"
⟨*proof*⟩

lemma *Un_lepoll_succ:* "A ≲ B ⟹ A ∪ {a} ≲ succ(B)"
⟨*proof*⟩

lemma *Diff_UN_succ_empty:* "Ord(a) ⟹ F(a) - (⋃b<succ(a). F(b)) = 0"
⟨*proof*⟩

lemma *Diff_UN_succ_subset:* "Ord(a) ⟹ F(a) ∪ X - (⋃b<succ(a). F(b))
⊆ X"
⟨*proof*⟩

lemma *recfunAC16_Diff_lepoll_1:*
"Ord(x)
⟹ recfunAC16(f, g, x, a) - (⋃i<x. recfunAC16(f, g, i, a)) ≲ 1"
⟨*proof*⟩

lemma *in_Least_Diff:*
"⟦z ∈ F(x); Ord(x)⟧
⟹ z ∈ F(μ i. z ∈ F(i)) - (⋃j<(μ i. z ∈ F(i)). F(j))"
⟨*proof*⟩

lemma *Least_eq_imp_ex:*
```
"⟦(μ i. w ∈ F(i)) = (μ i. z ∈ F(i));
    w ∈ (⋃i<a. F(i)); z ∈ (⋃i<a. F(i))⟧
 ⟹ ∃b<a. w ∈ (F(b) - (⋃c<b. F(c))) ∧ z ∈ (F(b) - (⋃c<b. F(c)))"
```
⟨*proof*⟩

lemma *two_in_lepoll_1:* `"⟦A ≲ 1; a ∈ A; b ∈ A⟧ ⟹ a=b"`
⟨*proof*⟩

lemma *UN_lepoll_index:*
```
"⟦∀i<a. F(i)-(⋃j<i. F(j)) ≲ 1; Limit(a)⟧
 ⟹ (⋃x<a. F(x)) ≲ a"
```
⟨*proof*⟩

lemma *recfunAC16_lepoll_index:* `"Ord(y) ⟹ recfunAC16(f, h, y, a) ≲ y"`
⟨*proof*⟩

lemma *Union_recfunAC16_lesspoll:*
```
"⟦recfunAC16(f,g,y,a) ⊆ {X ∈ Pow(A). X≈n};
    A≈a;  y<a;  ¬Finite(a);  Card(a);  n ∈ nat⟧
 ⟹ ⋃(recfunAC16(f,g,y,a))≺a"
```
⟨*proof*⟩

lemma *dbl_Diff_eqpoll:*
```
"⟦recfunAC16(f, h, y, a) ⊆ {X ∈ Pow(A) . X≈succ(k #+ m)};
    Card(a); ¬ Finite(a); A≈a;
    k ∈ nat;  y<a;
    h ∈ bij(a, {Y ∈ Pow(A). Y≈succ(k)})⟧
 ⟹ A - ⋃(recfunAC16(f, h, y, a)) - h‘y≈a"
```
⟨*proof*⟩

lemmas *disj_Un_eqpoll_nat_sum =*
```
    eqpoll_trans [THEN eqpoll_trans,
                  OF disj_Un_eqpoll_sum sum_eqpoll_cong nat_sum_eqpoll_sum]
```

lemma *Un_in_Collect:*
```
"⟦x ∈ Pow(A - B - h‘i); x≈m;
   h ∈ bij(a, {x ∈ Pow(A) . x≈k}); i<a; k ∈ nat; m ∈ nat⟧
   ⟹ h ‘ i ∪ x ∈ {x ∈ Pow(A) . x≈k #+ m}"
```
⟨*proof*⟩

lemma *lemma6:*
"⟦∀y<succ(j). F(y)<=X ∧ (∀x<a. x<y | P(x,y) ⟶ Q(x,y)); succ(j)<a⟧
⟹ F(j)<=X ∧ (∀x<a. x<j | P(x,j) ⟶ Q(x,j))"
⟨*proof*⟩

lemma *lemma7:*
"⟦∀x<a. x<j | P(x,j) ⟶ Q(x,j); succ(j)<a⟧
⟹ P(j,j) ⟶ (∀x<a. x≤j | P(x,j) ⟶ Q(x,j))"
⟨*proof*⟩

lemma *ex_subset_eqpoll:*
"⟦A≈a; ¬ Finite(a); Ord(a); m ∈ nat⟧ ⟹ ∃X ∈ Pow(A). X≈m"
⟨*proof*⟩

lemma *subset_Un_disjoint:* "⟦A ⊆ B ∪ C; A ∩ C = 0⟧ ⟹ A ⊆ B"
⟨*proof*⟩

lemma *Int_empty:*
"⟦X ∈ Pow(A - ⋃(B) -C); T ∈ B; F ⊆ T⟧ ⟹ F ∩ X = 0"
⟨*proof*⟩

lemma *subset_imp_eq_lemma:*
"m ∈ nat ⟹ ∀A B. A ⊆ B ∧ m ≲ A ∧ B ≲ m ⟶ A=B"
⟨*proof*⟩

lemma *subset_imp_eq:* "⟦A ⊆ B; m ≲ A; B ≲ m; m ∈ nat⟧ ⟹ A=B"
⟨*proof*⟩

lemma *bij_imp_arg_eq:*
"⟦f ∈ bij(a, {Y ∈ X. Y≈succ(k)}); k ∈ nat; f‘b ⊆ f‘y; b<a; y<a⟧

```
      ⟹ b=y"
```
⟨*proof*⟩

lemma *ex_next_set:*
```
     "⟦recfunAC16(f, h, y, a) ⊆ {X ∈ Pow(A) . X≈succ(k #+ m)};
        Card(a); ¬ Finite(a); A≈a;
        k ∈ nat; m ∈ nat; y<a;
        h ∈ bij(a, {Y ∈ Pow(A). Y≈succ(k)});
        ¬ (∃Y ∈ recfunAC16(f, h, y, a). h‘y ⊆ Y)⟧
      ⟹ ∃X ∈ {Y ∈ Pow(A). Y≈succ(k #+ m)}. h‘y ⊆ X ∧
                (∀b<a. h‘b ⊆ X ⟶
                (∀T ∈ recfunAC16(f, h, y, a). ¬ h‘b ⊆ T))"
```
⟨*proof*⟩

lemma *ex_next_Ord:*
```
     "⟦recfunAC16(f, h, y, a) ⊆ {X ∈ Pow(A) . X≈succ(k #+ m)};
        Card(a); ¬ Finite(a); A≈a;
        k ∈ nat; m ∈ nat; y<a;
        h ∈ bij(a, {Y ∈ Pow(A). Y≈succ(k)});
        f ∈ bij(a, {Y ∈ Pow(A). Y≈succ(k #+ m)});
        ¬ (∃Y ∈ recfunAC16(f, h, y, a). h‘y ⊆ Y)⟧
      ⟹ ∃c<a. h‘y ⊆ f‘c ∧
                (∀b<a. h‘b ⊆ f‘c ⟶
                (∀T ∈ recfunAC16(f, h, y, a). ¬ h‘b ⊆ T))"
```
⟨*proof*⟩

lemma *lemma8:*
```
     "⟦∀x<a. x<j | (∃xa ∈ F(j). P(x, xa))
        ⟶ (∃! Y. Y ∈ F(j) ∧ P(x, Y)); F(j) ⊆ X;
        L ∈ X; P(j, L) ∧ (∀x<a. P(x, L) ⟶ (∀xa ∈ F(j). ¬P(x, xa)))⟧

      ⟹ F(j) ∪ {L} ⊆ X ∧
          (∀x<a. x≤j | (∃xa ∈ (F(j) ∪ {L}). P(x, xa)) ⟶
                (∃! Y. Y ∈ (F(j) ∪ {L}) ∧ P(x, Y)))"
```
⟨*proof*⟩

lemma *main_induct:*
```
"⟦b < a; f ∈ bij(a, {Y ∈ Pow(A) . Y≈succ(k #+ m)});
   h ∈ bij(a, {Y ∈ Pow(A) . Y≈succ(k)});
   ¬Finite(a); Card(a); A≈a; k ∈ nat; m ∈ nat⟧
 ⟹ recfunAC16(f, h, b, a) ⊆ {X ∈ Pow(A) . X≈succ(k #+ m)} ∧
    (∀x<a. x < b | (∃Y ∈ recfunAC16(f, h, b, a). h ‘ x ⊆ Y) ⟶

    (∃! Y. Y ∈ recfunAC16(f, h, b, a) ∧ h ‘ x ⊆ Y))"
```
⟨*proof*⟩

lemma *lemma_simp_induct:*
```
"⟦∀b. b<a ⟶ F(b) ⊆ S ∧ (∀x<a. (x<b | (∃Y ∈ F(b). f‘x ⊆ Y))
                                ⟶ (∃! Y. Y ∈ F(b) ∧ f‘x ⊆ Y));
   f ∈ a->f‘‘(a); Limit(a);
   ∀i j. i≤j ⟶ F(i) ⊆ F(j)⟧
  ⟹ (⋃j<a. F(j)) ⊆ S ∧
     (∀x ∈ f‘‘a. ∃! Y. Y ∈ (⋃j<a. F(j)) ∧ x ⊆ Y)"
```
⟨*proof*⟩

theorem *WO2_AC16:* `"⟦WO2; 0<m; k ∈ nat; m ∈ nat⟧ ⟹ AC16(k #+ m,k)"`
⟨*proof*⟩

end

theory *AC16_WO4*
imports *AC16_lemmas*
begin

lemma *lemma1:*
```
"⟦Finite(A); 0<m; m ∈ nat⟧
 ⟹ ∃a f. Ord(a) ∧ domain(f) = a ∧
```

$$(\bigcup b<a.\ f`b) = A \ \wedge\ (\forall b<a.\ f`b \lesssim m)"$$

⟨*proof*⟩

lemmas *well_ord_paired = paired_bij [THEN bij_is_inj, THEN well_ord_rvimage]*

lemma *lepoll_trans1:* "$[\![A \lesssim B;\ \neg\ A \lesssim C]\!] \Longrightarrow \neg\ B \lesssim C$"
⟨*proof*⟩

lemmas *lepoll_paired = paired_eqpoll [THEN eqpoll_sym, THEN eqpoll_imp_lepoll]*

lemma *lemma2:* "$\exists y\ R.\ well_ord(y,R) \wedge x \cap y = 0 \wedge \neg y \lesssim z \wedge \neg Finite(y)$"
⟨*proof*⟩

lemma *infinite_Un:* "$\neg Finite(B) \Longrightarrow \neg Finite(A \cup B)$"
⟨*proof*⟩

lemma *succ_not_lepoll_lemma:*
"$[\![\neg(\exists x \in A.\ f`x=y);\ f \in inj(A, B);\ y \in B]\!]$
$\Longrightarrow (\lambda a \in succ(A).\ if(a=A, y, f`a)) \in inj(succ(A), B)$"
⟨*proof*⟩

lemma *succ_not_lepoll_imp_eqpoll:* "$[\![\neg A \approx B;\ A \lesssim B]\!] \Longrightarrow succ(A) \lesssim B$"
⟨*proof*⟩

lemmas *ordertype_eqpoll =*
ordermap_bij [THEN exI [THEN eqpoll_def [THEN def_imp_iff, THEN iffD2]]]

lemma *cons_cons_subset:*
"⟦a ⊆ y; b ∈ y-a; u ∈ x⟧ ⟹ cons(b, cons(u, a)) ∈ Pow(x ∪ y)"
⟨*proof*⟩

lemma *cons_cons_eqpoll:*
"⟦a ≈ k; a ⊆ y; b ∈ y-a; u ∈ x; x ∩ y = 0⟧
⟹ cons(b, cons(u, a)) ≈ succ(succ(k))"
⟨*proof*⟩

lemma *set_eq_cons:*
"⟦succ(k) ≈ A; k ≈ B; B ⊆ A; a ∈ A-B; k ∈ nat⟧ ⟹ A = cons(a, B)"
⟨*proof*⟩

lemma *cons_eqE: "⟦cons(x,a) = cons(y,a); x ∉ a⟧ ⟹ x = y "*
⟨*proof*⟩

lemma *eq_imp_Int_eq: "A = B ⟹ A ∩ C = B ∩ C"*
⟨*proof*⟩

lemma *eqpoll_sum_imp_Diff_lepoll_lemma [rule_format]:*
"⟦k ∈ nat; m ∈ nat⟧
⟹ ∀A B. A ≈ k #+ m ∧ k ≲ B ∧ B ⊆ A ⟶ A-B ≲ m"
⟨*proof*⟩

lemma *eqpoll_sum_imp_Diff_lepoll:*
"⟦A ≈ succ(k #+ m); B ⊆ A; succ(k) ≲ B; k ∈ nat; m ∈ nat⟧
⟹ A-B ≲ m"
⟨*proof*⟩

lemma *eqpoll_sum_imp_Diff_eqpoll_lemma [rule_format]:*
"⟦k ∈ nat; m ∈ nat⟧
⟹ ∀A B. A ≈ k #+ m ∧ k ≈ B ∧ B ⊆ A ⟶ A-B ≈ m"
⟨*proof*⟩

lemma *eqpoll_sum_imp_Diff_eqpoll:*
"⟦A ≈ succ(k #+ m); B ⊆ A; succ(k) ≈ B; k ∈ nat; m ∈ nat⟧
⟹ A-B ≈ m"
⟨*proof*⟩

lemma *subsets_lepoll_0_eq_unit:* "{x ∈ Pow(X). x ≲ 0} = {0}"
⟨*proof*⟩

lemma *subsets_lepoll_succ:*
"n ∈ nat ⟹ {z ∈ Pow(y). z ≲ succ(n)} =
{z ∈ Pow(y). z ≲ n} ∪ {z ∈ Pow(y). z ≈ succ(n)}"
⟨*proof*⟩

lemma *Int_empty:*
"n ∈ nat ⟹ {z ∈ Pow(y). z ≲ n} ∩ {z ∈ Pow(y). z ≈ succ(n)} =
0"
⟨*proof*⟩

locale *AC16* =
fixes *x* **and** *y* **and** *k* **and** *l* **and** *m* **and** *t_n* **and** *R* **and** *MM* **and** *LL* **and** *GG* **and** *s*
defines *k_def:* "k ≡ succ(l)"
and *MM_def:* "MM ≡ {v ∈ t_n. succ(k) ≲ v ∩ y}"
and *LL_def:* "LL ≡ {v ∩ y. v ∈ MM}"
and *GG_def:* "GG ≡ λv ∈ LL. (THE w. w ∈ MM ∧ v ⊆ w) - v"
and *s_def:* "s(u) ≡ {v ∈ t_n. u ∈ v ∧ k ≲ v ∩ y}"
assumes *all_ex:* "∀z ∈ {z ∈ Pow(x ∪ y) . z ≈ succ(k)}.
∃! w. w ∈ t_n ∧ z ⊆ w "
and *disjoint[iff]:* "x ∩ y = 0"
and *"includes":* "t_n ⊆ {v ∈ Pow(x ∪ y). v ≈ succ(k #+ m)}"
and *WO_R[iff]:* "well_ord(y,R)"
and *lnat[iff]:* "l ∈ nat"
and *mnat[iff]:* "m ∈ nat"
and *mpos[iff]:* "0<m"
and *Infinite[iff]:* "¬ Finite(y)"
and *noLepoll:* "¬ y ≲ {v ∈ Pow(x). v ≈ m}"
begin

lemma *knat [iff]:* "k ∈ nat"
⟨*proof*⟩

lemma *Diff_Finite_eqpoll:* "⟦l ≈ a; a ⊆ y⟧ ⟹ y - a ≈ y"
⟨*proof*⟩

lemma *s_subset:* "s(u) ⊆ t_n"
⟨*proof*⟩

lemma *sI:*
"⟦w ∈ t_n; cons(b,cons(u,a)) ⊆ w; a ⊆ y; b ∈ y-a; l ≈ a⟧
⟹ w ∈ s(u)"
⟨*proof*⟩

lemma *in_s_imp_u_in:* "v ∈ s(u) ⟹ u ∈ v"
⟨*proof*⟩

lemma *ex1_superset_a:*
"⟦l ≈ a; a ⊆ y; b ∈ y - a; u ∈ x⟧
⟹ ∃! c. c ∈ s(u) ∧ a ⊆ c ∧ b ∈ c"
⟨*proof*⟩

lemma *the_eq_cons:*
"⟦∀v ∈ s(u). succ(l) ≈ v ∩ y;
l ≈ a; a ⊆ y; b ∈ y - a; u ∈ x⟧
⟹ (THE c. c ∈ s(u) ∧ a ⊆ c ∧ b ∈ c) ∩ y = cons(b, a)"
⟨*proof*⟩

lemma *y_lepoll_subset_s:*
"⟦∀v ∈ s(u). succ(l) ≈ v ∩ y;
l ≈ a; a ⊆ y; u ∈ x⟧
⟹ y ≲ {v ∈ s(u). a ⊆ v}"
⟨*proof*⟩

lemma *x_imp_not_y [dest]:* "a ∈ x ⟹ a ∉ y"
⟨*proof*⟩

lemma *w_Int_eq_w_Diff:*
"w ⊆ x ∪ y ⟹ w ∩ (x - {u}) = w - cons(u, w ∩ y)"
⟨*proof*⟩

lemma *w_Int_eqpoll_m:*
"⟦w ∈ {v ∈ s(u). a ⊆ v};
l ≈ a; u ∈ x;
∀v ∈ s(u). succ(l) ≈ v ∩ y⟧
⟹ w ∩ (x - {u}) ≈ m"
⟨*proof*⟩

lemma *eqpoll_m_not_empty:* "a ≈ m ⟹ a ≠ 0"
⟨*proof*⟩

lemma *cons_cons_in:*
"⟦z ∈ xa ∩ (x - {u}); l ≈ a; a ⊆ y; u ∈ x⟧
⟹ ∃! w. w ∈ t_n ∧ cons(z, cons(u, a)) ⊆ w"
⟨*proof*⟩

lemma *subset_s_lepoll_w:*
"⟦∀v ∈ s(u). succ(l) ≈ v ∩ y; a ⊆ y; l ≈ a; u ∈ x⟧
⟹ {v ∈ s(u). a ⊆ v} ≲ {v ∈ Pow(x). v ≈ m}"
⟨*proof*⟩

lemma *well_ord_subsets_eqpoll_n:*
"n ∈ nat ⟹ ∃S. well_ord({z ∈ Pow(y) . z ≈ succ(n)}, S)"
⟨*proof*⟩

lemma *well_ord_subsets_lepoll_n:*
"n ∈ nat ⟹ ∃R. well_ord({z ∈ Pow(y). z ≲ n}, R)"
⟨*proof*⟩

lemma *LL_subset:* "LL ⊆ {z ∈ Pow(y). z ≲ succ(k #+ m)}"
⟨*proof*⟩

lemma *well_ord_LL:* "∃S. well_ord(LL,S)"
⟨*proof*⟩

lemma *unique_superset_in_MM:*
"v ∈ LL ⟹ ∃! w. w ∈ MM ∧ v ⊆ w"
⟨*proof*⟩

lemma *Int_in_LL:* "w ∈ MM ⟹ w ∩ y ∈ LL"
⟨*proof*⟩

lemma *in_LL_eq_Int:*
"v ∈ LL ⟹ v = (THE x. x ∈ MM ∧ v ⊆ x) ∩ y"
⟨*proof*⟩

lemma *unique_superset1:* "a ∈ LL ⟹ (THE x. x ∈ MM ∧ a ⊆ x) ∈ MM"
⟨*proof*⟩

lemma *the_in_MM_subset:*
"v ∈ LL ⟹ (THE x. x ∈ MM ∧ v ⊆ x) ⊆ x ∪ y"
⟨*proof*⟩

lemma *GG_subset:* "v ∈ LL ⟹ GG ‘ v ⊆ x"
⟨*proof*⟩

lemma *nat_lepoll_ordertype:* "nat ≲ ordertype(y, R)"
⟨*proof*⟩

lemma *ex_subset_eqpoll_n:* "n ∈ nat ⟹ ∃z. z ⊆ y ∧ n ≈ z"
⟨*proof*⟩

lemma *exists_proper_in_s:* "u ∈ x ⟹ ∃v ∈ s(u). succ(k) ≲ v ∩ y"
⟨*proof*⟩

lemma *exists_in_MM:* "u ∈ x ⟹ ∃w ∈ MM. u ∈ w"
⟨*proof*⟩

lemma *exists_in_LL:* "u ∈ x ⟹ ∃w ∈ LL. u ∈ GG‘w"
⟨*proof*⟩

lemma *OUN_eq_x:* "well_ord(LL,S) ⟹

(⋃b<ordertype(LL,S). GG ‘ (converse(ordermap(LL,S)) ‘ b)) = x"
⟨*proof*⟩

lemma *in_MM_eqpoll_n:* "w ∈ MM ⟹ w ≈ succ(k #+ m)"
⟨*proof*⟩

lemma *in_LL_eqpoll_n:* "w ∈ LL ⟹ succ(k) ≲ w"
⟨*proof*⟩

lemma *in_LL:* "w ∈ LL ⟹ w ⊆ (THE x. x ∈ MM ∧ w ⊆ x)"
⟨*proof*⟩

lemma *all_in_lepoll_m:*
"well_ord(LL,S) ⟹
∀b<ordertype(LL,S). GG ‘ (converse(ordermap(LL,S)) ‘ b) ≲ m"
⟨*proof*⟩

lemma *"conclusion":*
"∃a f. Ord(a) ∧ domain(f) = a ∧ (⋃b<a. f ‘ b) = x ∧ (∀b<a. f ‘ b ≲ m)"
⟨*proof*⟩

end

theorem *AC16_WO4:*
"⟦AC_Equiv.AC16(k #+ m, k); 0 < k; 0 < m; k ∈ nat; m ∈ nat⟧ ⟹ WO4(m)"
⟨*proof*⟩

end

theory *AC17_AC1*
imports *HH*
begin

lemma *AC0_AC1_lemma:* "⟦f:(∏X ∈ A. X); D ⊆ A⟧ ⟹ ∃g. g:(∏X ∈ D.

X)"
⟨*proof*⟩

lemma *AC0_AC1: "AC0 ⟹ AC1"*
⟨*proof*⟩

lemma *AC1_AC0: "AC1 ⟹ AC0"*
⟨*proof*⟩

lemma *AC1_AC17_lemma: "f ∈ (∏ X ∈ Pow(A) - {0}. X) ⟹ f ∈ (Pow(A) - {0} -> A)"*
⟨*proof*⟩

lemma *AC1_AC17: "AC1 ⟹ AC17"*
⟨*proof*⟩

lemma *UN_eq_imp_well_ord:*
"⟦x - (⋃ j ∈ μ i. HH(λX ∈ Pow(x)-{0}. {f‘X}, x, i) = {x}.
HH(λX ∈ Pow(x)-{0}. {f‘X}, x, j)) = 0;
f ∈ Pow(x)-{0} -> x⟧
⟹ ∃r. well_ord(x,r)"
⟨*proof*⟩

lemma *not_AC1_imp_ex:*
"¬AC1 ⟹ ∃A. ∀f ∈ Pow(A)-{0} -> A. ∃u ∈ Pow(A)-{0}. f‘u ∉ u"
⟨*proof*⟩

lemma *AC17_AC1_aux1:*
"⟦∀f ∈ Pow(x) - {0} -> x. ∃u ∈ Pow(x) - {0}. f‘u∉u;
∃f ∈ Pow(x)-{0}->x.
x - (⋃a ∈ (μ i. HH(λX ∈ Pow(x)-{0}. {f‘X},x,i)={x}).
HH(λX ∈ Pow(x)-{0}. {f‘X},x,a)) = 0⟧
⟹ P"
⟨*proof*⟩

lemma *AC17_AC1_aux2:*
"¬ (∃f ∈ Pow(x)-{0}->x. x - F(f) = 0)
⟹ (λf ∈ Pow(x)-{0}->x . x - F(f))
∈ (Pow(x) -{0} -> x) -> Pow(x) - {0}"
⟨*proof*⟩

lemma *AC17_AC1_aux3:*
"⟦f‘Z ∈ Z; Z ∈ Pow(x)-{0}⟧
⟹ (λX ∈ Pow(x)-{0}. {f‘X})‘Z ∈ Pow(Z)-{0}"
⟨*proof*⟩

lemma *AC17_AC1_aux4:*
"∃f ∈ F. f‘((λf ∈ F. Q(f))‘f) ∈ (λf ∈ F. Q(f))‘f
⟹ ∃f ∈ F. f‘Q(f) ∈ Q(f)"
⟨*proof*⟩

lemma *AC17_AC1:* "AC17 ⟹ AC1"
⟨*proof*⟩

lemma *AC1_AC2_aux1:*
"⟦f:(∏ X ∈ A. X); B ∈ A; 0∉A⟧ ⟹ {f‘B} ⊆ B ∩ {f‘C. C ∈ A}"
⟨*proof*⟩

lemma *AC1_AC2_aux2:*
"⟦pairwise_disjoint(A); B ∈ A; C ∈ A; D ∈ B; D ∈ C⟧ ⟹ f‘B
= f‘C"
⟨*proof*⟩

lemma *AC1_AC2:* "AC1 ⟹ AC2"
⟨*proof*⟩

lemma *AC2_AC1_aux1:* "0∉A ⟹ 0 ∉ {B*{B}. B ∈ A}"
⟨*proof*⟩

lemma *AC2_AC1_aux2:* "⟦X*{X} ∩ C = {y}; X ∈ A⟧
⟹ (THE y. X*{X} ∩ C = {y}): X*A"
⟨*proof*⟩

lemma *AC2_AC1_aux3:*
"∀D ∈ {E*{E}. E ∈ A}. ∃y. D ∩ C = {y}
⟹ (λx ∈ A. fst(THE z. (x*{x} ∩ C = {z}))) ∈ (∏X ∈ A. X)"
⟨*proof*⟩

lemma *AC2_AC1:* "AC2 ⟹ AC1"
⟨*proof*⟩

lemma *empty_notin_images:* "0 ∉ {R``{x}. x ∈ domain(R)}"
⟨*proof*⟩

lemma *AC1_AC4:* "AC1 ⟹ AC4"
⟨*proof*⟩

lemma *AC4_AC3_aux1:* "f ∈ A->B ⟹ (⋃z ∈ A. {z}*f`z) ⊆ A*⋃(B)"
⟨*proof*⟩

lemma *AC4_AC3_aux2:* "domain(⋃z ∈ A. {z}*f(z)) = {a ∈ A. f(a)≠0}"
⟨*proof*⟩

lemma *AC4_AC3_aux3:* "x ∈ A ⟹ (⋃z ∈ A. {z}*f(z))``{x} = f(x)"
⟨*proof*⟩

lemma *AC4_AC3:* "AC4 ⟹ AC3"
⟨*proof*⟩

lemma *AC3_AC1_lemma:*
"b∉A ⟹ (∏x ∈ {a ∈ A. id(A)`a≠b}. id(A)`x) = (∏x ∈ A. x)"
⟨*proof*⟩

lemma *AC3_AC1:* "AC3 ⟹ AC1"
⟨*proof*⟩

lemma *AC4_AC5: "AC4 ⟹ AC5"*
⟨*proof*⟩

lemma *AC5_AC4_aux1: "R ⊆ A*B ⟹ (λx ∈ R. fst(x)) ∈ R -> A"*
⟨*proof*⟩

lemma *AC5_AC4_aux2: "R ⊆ A*B ⟹ range(λx ∈ R. fst(x)) = domain(R)"*
⟨*proof*⟩

lemma *AC5_AC4_aux3: "⟦∃f ∈ A->C. P(f,domain(f)); A=B⟧ ⟹ ∃f ∈ B->C. P(f,B)"*
⟨*proof*⟩

lemma *AC5_AC4_aux4: "⟦R ⊆ A*B; g ∈ C->R; ∀x ∈ C. (λz ∈ R. fst(z))‘(g‘x) = x⟧*
⟹ (λx ∈ C. snd(g‘x)): (∏x ∈ C. R‘‘{x})"
⟨*proof*⟩

lemma *AC5_AC4: "AC5 ⟹ AC4"*
⟨*proof*⟩

lemma *AC1_iff_AC6: "AC1 ⟷ AC6"*
⟨*proof*⟩

end

theory *AC18_AC19*
imports *AC_Equiv*
begin

definition
uu :: "i ⇒ i" **where**
"uu(a) ≡ {c ∪ {0}. c ∈ a}"

lemma *PROD_subsets:*
"⟦*f* ∈ (∏ *b* ∈ {*P*(*a*). *a* ∈ *A*}. *b*); ∀ *a* ∈ *A*. *P*(*a*)<=*Q*(*a*)⟧
⟹ (λ*a* ∈ *A*. *f*‘*P*(*a*)) ∈ (∏ *a* ∈ *A*. *Q*(*a*))"
⟨*proof*⟩

lemma *lemma_AC18:*
"⟦∀ *A*. 0 ∉ *A* ⟶ (∃ *f*. *f* ∈ (∏ *X* ∈ *A*. *X*)); *A* ≠ 0⟧
⟹ (⋂ *a* ∈ *A*. ⋃ *b* ∈ *B*(*a*). *X*(*a*, *b*)) ⊆
(⋃ *f* ∈ ∏ *a* ∈ *A*. *B*(*a*). ⋂ *a* ∈ *A*. *X*(*a*, *f*‘*a*))"
⟨*proof*⟩

lemma *AC1_AC18:* "*AC1* ⟹ *PROP AC18*"
⟨*proof*⟩

theorem (**in** *AC18*) *AC19*
⟨*proof*⟩

lemma *RepRep_conj:*
"⟦*A* ≠ 0; 0 ∉ *A*⟧ ⟹ {*uu*(*a*). *a* ∈ *A*} ≠ 0 ∧ 0 ∉ {*uu*(*a*). *a* ∈ *A*}"
⟨*proof*⟩

lemma *lemma1_1:* "⟦*c* ∈ *a*; *x* = *c* ∪ {0}; *x* ∉ *a*⟧ ⟹ *x* - {0} ∈ *a*"
⟨*proof*⟩

lemma *lemma1_2:*
"⟦*f*‘(*uu*(*a*)) ∉ *a*; *f* ∈ (∏ *B* ∈ {*uu*(*a*). *a* ∈ *A*}. *B*); *a* ∈ *A*⟧
⟹ *f*‘(*uu*(*a*))-{0} ∈ *a*"
⟨*proof*⟩

lemma *lemma1:* "∃ *f*. *f* ∈ (∏ *B* ∈ {*uu*(*a*). *a* ∈ *A*}. *B*) ⟹ ∃ *f*. *f* ∈ (∏ *B* ∈ *A*. *B*)"
⟨*proof*⟩

lemma *lemma2_1:* "*a*≠0 ⟹ 0 ∈ (⋃ *b* ∈ *uu*(*a*). *b*)"
⟨*proof*⟩

lemma *lemma2:* "⟦*A*≠0; 0∉*A*⟧ ⟹ (⋂ *x* ∈ {*uu*(*a*). *a* ∈ *A*}. ⋃ *b* ∈ *x*. *b*) ≠

```
0"
```
⟨*proof*⟩

lemma *AC19_AC1: "AC19 ⟹ AC1"*
⟨*proof*⟩

end

theory *DC*
imports *AC_Equiv Hartog Cardinal_aux*
begin

lemma *RepFun_lepoll: "Ord(a) ⟹ {P(b). b ∈ a} ≲ a"*
⟨*proof*⟩

Trivial in the presence of AC, but here we need a wellordering of X

lemma *image_Ord_lepoll: "⟦f ∈ X->Y; Ord(X)⟧ ⟹ f``X ≲ X"*
⟨*proof*⟩

lemma *range_subset_domain:*
*"⟦R ⊆ X*X; ⋀g. g ∈ X ⟹ ∃u. ⟨g,u⟩ ∈ R⟧*
⟹ range(R) ⊆ domain(R)"
⟨*proof*⟩

lemma *cons_fun_type: "g ∈ n->X ⟹ cons(⟨n,x⟩, g) ∈ succ(n) -> cons(x, X)"*
⟨*proof*⟩

lemma *cons_fun_type2:*
"⟦g ∈ n->X; x ∈ X⟧ ⟹ cons(⟨n,x⟩, g) ∈ succ(n) -> X"
⟨*proof*⟩

lemma *cons_image_n: "n ∈ nat ⟹ cons(⟨n,x⟩, g)``n = g``n"*
⟨*proof*⟩

lemma *cons_val_n: "g ∈ n->X ⟹ cons(⟨n,x⟩, g)`n = x"*
⟨*proof*⟩

lemma *cons_image_k: "k ∈ n ⟹ cons(⟨n,x⟩, g)``k = g``k"*
⟨*proof*⟩

lemma *cons_val_k: "⟦k ∈ n; g ∈ n->X⟧ ⟹ cons(⟨n,x⟩, g)`k = g`k"*
⟨*proof*⟩

lemma *domain_cons_eq_succ: "domain(f)=x ⟹ domain(cons(⟨x,y⟩, f)) = succ(x)"*
⟨*proof*⟩

lemma *restrict_cons_eq: "g ∈ n->X ⟹ restrict(cons(⟨n,x⟩, g), n) = g"*
⟨*proof*⟩

lemma *succ_in_succ: "⟦Ord(k); i ∈ k⟧ ⟹ succ(i) ∈ succ(k)"*
⟨*proof*⟩

lemma *restrict_eq_imp_val_eq:*
"⟦restrict(f, domain(g)) = g; x ∈ domain(g)⟧
⟹ f‘x = g‘x"
⟨*proof*⟩

lemma *domain_eq_imp_fun_type: "⟦domain(f)=A; f ∈ B->C⟧ ⟹ f ∈ A->C"*
⟨*proof*⟩

lemma *ex_in_domain: "⟦R ⊆ A * B; R ≠ 0⟧ ⟹ ∃x. x ∈ domain(R)"*
⟨*proof*⟩

definition
DC :: "i ⇒ o" **where**
*"DC(a) ≡ ∀X R. R ⊆ Pow(X)*X ∧*
(∀Y ∈ Pow(X). Y ≺ a ⟶ (∃x ∈ X. ⟨Y,x⟩ ∈ R))
⟶ (∃f ∈ a->X. ∀b<a. <f‘‘b,f‘b> ∈ R)"

definition
DC0 :: o **where**
*"DC0 ≡ ∀A B R. R ⊆ A*B ∧ R≠0 ∧ range(R) ⊆ domain(R)*
⟶ (∃f ∈ nat->domain(R). ∀n ∈ nat. <f‘n,f‘succ(n)>:R)"

definition
ff :: "[i, i, i, i] ⇒ i" **where**
"ff(b, X, Q, R) ≡
transrec(b, λc r. THE x. first(x, {x ∈ X. <r‘‘c, x> ∈ R}, Q))"

locale *DC0_imp =*
fixes *XX* **and** *RR* **and** *X* **and** *R*

assumes *all_ex: "∀Y ∈ Pow(X). Y ≺ nat ⟶ (∃x ∈ X. ⟨Y, x⟩ ∈ R)"*

defines *XX_def: "XX ≡ (⋃n ∈ nat. {f ∈ n->X. ∀k ∈ n. <f‘‘k, f‘k> ∈ R})"*
and *RR_def: "RR ≡ {⟨z1,z2⟩:XX*XX. domain(z2)=succ(domain(z1))*
∧ restrict(z2, domain(z1)) = z1}"
begin

lemma *lemma1_1: "RR ⊆ XX*XX"*
⟨*proof*⟩

lemma *lemma1_2: "RR ≠ 0"*
⟨*proof*⟩

lemma *lemma1_3: "range(RR) ⊆ domain(RR)"*
⟨*proof*⟩

lemma *lemma2:*
"⟦∀n ∈ nat. <f‘n, f‘succ(n)> ∈ RR; f ∈ nat -> XX; n ∈ nat⟧
⟹ ∃k ∈ nat. f‘succ(n) ∈ k -> X ∧ n ∈ k
∧ <f‘succ(n)‘‘n, f‘succ(n)‘n> ∈ R"
⟨*proof*⟩

lemma *lemma3_1:*
"⟦∀n ∈ nat. <f‘n, f‘succ(n)> ∈ RR; f ∈ nat -> XX; m ∈ nat⟧
⟹ {f‘succ(x)‘x. x ∈ m} = {f‘succ(m)‘x. x ∈ m}"
⟨*proof*⟩

lemma *lemma3:*
"⟦∀n ∈ nat. <f‘n, f‘succ(n)> ∈ RR; f ∈ nat -> XX; m ∈ nat⟧
⟹ (λx ∈ nat. f‘succ(x)‘x) ‘‘ m = f‘succ(m)‘‘m"
⟨*proof*⟩

end

theorem *DC0_imp_DC_nat: "DC0 ⟹ DC(nat)"*
⟨*proof*⟩

lemma *singleton_in_funs:*
"x ∈ X ⟹ {⟨0,x⟩} ∈
(⋃n ∈ nat. {f ∈ succ(n)->X. ∀k ∈ n. <f‘k, f‘succ(k)> ∈ R})"
⟨*proof*⟩

locale *imp_DC0 =*
fixes *XX* **and** *RR* **and** *x* **and** *R* **and** *f* **and** *allRR*
defines *XX_def: "XX ≡ (⋃n ∈ nat.*
{f ∈ succ(n)->domain(R). ∀k ∈ n. <f‘k, f‘succ(k)> ∈ R})"
and *RR_def:*
*"RR ≡ {⟨z1,z2⟩:Fin(XX)*XX.*
(domain(z2)=succ(⋃f ∈ z1. domain(f))
∧ (∀f ∈ z1. restrict(z2, domain(f)) = f))
| (¬ (∃g ∈ XX. domain(g)=succ(⋃f ∈ z1. domain(f))
∧ (∀f ∈ z1. restrict(g, domain(f)) = f)) ∧ z2={⟨0,x⟩})}"
and *allRR_def:*
"allRR ≡ ∀b<nat.
<f‘‘b, f‘b> ∈
*{⟨z1,z2⟩∈Fin(XX)*XX. (domain(z2)=succ(⋃f ∈ z1. domain(f))*
∧ (⋃f ∈ z1. domain(f)) = b
∧ (∀f ∈ z1. restrict(z2,domain(f)) = f))}"
begin

lemma *lemma4:*
"⟦range(R) ⊆ domain(R); x ∈ domain(R)⟧
*⟹ RR ⊆ Pow(XX)*XX ∧*
(∀Y ∈ Pow(XX). Y ≺ nat ⟶ (∃x ∈ XX. ⟨Y,x⟩:RR))"
⟨*proof*⟩

lemma *UN_image_succ_eq:*
"⟦f ∈ nat->X; n ∈ nat⟧
⟹ (⋃x ∈ f‘‘succ(n). P(x)) = P(f‘n) ∪ (⋃x ∈ f‘‘n. P(x))"
⟨*proof*⟩

lemma *UN_image_succ_eq_succ:*

```
"⟦(⋃x ∈ f``n. P(x)) = y; P(f`n) = succ(y);
   f ∈ nat -> X; n ∈ nat⟧ ⟹ (⋃x ∈ f``succ(n). P(x)) = succ(y)"
```
⟨*proof*⟩

lemma *apply_domain_type:*
```
"⟦h ∈ succ(n) -> D;  n ∈ nat; domain(h)=succ(y)⟧ ⟹ h`y ∈ D"
```
⟨*proof*⟩

lemma *image_fun_succ:*
```
"⟦h ∈ nat -> X; n ∈ nat⟧ ⟹ h``succ(n) = cons(h`n, h``n)"
```
⟨*proof*⟩

lemma *f_n_type:*
```
"⟦domain(f`n) = succ(k); f ∈ nat -> XX;  n ∈ nat⟧
 ⟹ f`n ∈ succ(k) -> domain(R)"
```
⟨*proof*⟩

lemma *f_n_pairs_in_R [rule_format]:*
```
"⟦h ∈ nat -> XX;  domain(h`n) = succ(k);  n ∈ nat⟧
 ⟹ ∀i ∈ k. <h`n`i, h`n`succ(i)> ∈ R"
```
⟨*proof*⟩

lemma *restrict_cons_eq_restrict:*
```
"⟦restrict(h, domain(u))=u;  h ∈ n->X;  domain(u) ⊆ n⟧
 ⟹ restrict(cons(⟨n, y⟩, h), domain(u)) = u"
```
⟨*proof*⟩

lemma *all_in_image_restrict_eq:*
```
"⟦∀x ∈ f``n. restrict(f`n, domain(x))=x;
   f ∈ nat -> XX;
   n ∈ nat;  domain(f`n) = succ(n);
   (⋃x ∈ f``n. domain(x)) ⊆ n⟧
 ⟹ ∀x ∈ f``succ(n). restrict(cons(<succ(n),y>, f`n), domain(x))
= x"
```
⟨*proof*⟩

lemma *simplify_recursion:*
```
"⟦∀b<nat. <f``b, f`b> ∈ RR;
   f ∈ nat -> XX; range(R) ⊆ domain(R); x ∈ domain(R)⟧
 ⟹ allRR"
```
⟨*proof*⟩

lemma *lemma2:*
```
"⟦allRR; f ∈ nat->XX; range(R) ⊆ domain(R); x ∈ domain(R); n ∈
nat⟧
 ⟹ f`n ∈ succ(n) -> domain(R) ∧ (∀i ∈ n. <f`n`i, f`n`succ(i)>:R)"
```
⟨*proof*⟩

lemma *lemma3:*
"⟦allRR; f ∈ nat->XX; n∈nat; range(R) ⊆ domain(R); x ∈ domain(R)⟧
⟹ f‘n‘n = f‘succ(n)‘n"
⟨*proof*⟩

end

theorem *DC_nat_imp_DC0: "DC(nat) ⟹ DC0"*
⟨*proof*⟩

lemma *fun_Ord_inj:*
"⟦f ∈ a->X; Ord(a);
⋀b c. ⟦b<c; c ∈ a⟧ ⟹ f‘b≠f‘c⟧
⟹ f ∈ inj(a, X)"
⟨*proof*⟩

lemma *value_in_image: "⟦f ∈ X->Y; A ⊆ X; a ∈ A⟧ ⟹ f‘a ∈ f‘‘A"*
⟨*proof*⟩

lemma *lesspoll_lemma: "⟦¬ A ≺ B; C ≺ B⟧ ⟹ A - C ≠ 0"*
⟨*proof*⟩

theorem *DC_WO3: "(∀K. Card(K) ⟶ DC(K)) ⟹ WO3"*
⟨*proof*⟩

lemma *images_eq:*
"⟦∀x ∈ A. f‘x=g‘x; f ∈ Df->Cf; g ∈ Dg->Cg; A ⊆ Df; A ⊆ Dg⟧
⟹ f‘‘A = g‘‘A"
⟨*proof*⟩

lemma *lam_images_eq:*
"⟦Ord(a); b ∈ a⟧ ⟹ (λx ∈ a. h(x))‘‘b = (λx ∈ b. h(x))‘‘b"
⟨*proof*⟩

lemma *lam_type_RepFun: "(λb ∈ a. h(b)) ∈ a -> {h(b). b ∈ a}"*
⟨*proof*⟩

lemma *lemmaX:*
"⟦∀Y ∈ Pow(X). Y ≺ K ⟶ (∃x ∈ X. ⟨Y, x⟩ ∈ R);
b ∈ K; Z ∈ Pow(X); Z ≺ K⟧

```
      ⟹ {x ∈ X. ⟨Z,x⟩ ∈ R} ≠ 0"
```
⟨*proof*⟩

lemma *WO1_DC_lemma:*
```
     "⟦Card(K); well_ord(X,Q);
        ∀Y ∈ Pow(X). Y ≺ K ⟶ (∃x ∈ X. ⟨Y, x⟩ ∈ R); b ∈ K⟧
      ⟹ ff(b, X, Q, R) ∈ {x ∈ X. <(λc ∈ b. ff(c, X, Q, R))‘‘b, x> ∈
R}"
```
⟨*proof*⟩

theorem *WO1_DC_Card:* `"WO1 ⟹ ∀K. Card(K) ⟶ DC(K)"`
⟨*proof*⟩

end

References

[1] Lawrence C. Paulson and Krzysztof Grąbczewski. Mechanizing set theory: Cardinal arithmetic and the axiom of choice. *Journal of Automated Reasoning*, 17(3):291–323, December 1996.

[2] Herman Rubin and Jean E. Rubin. *Equivalents of the Axiom of Choice, II.* North-Holland, 1985.