NanoJava

David von Oheimb
Tobias Nipkow

October 24, 2026

Abstract

These theories define *NanoJava*, a very small fragment of the programming language Java (with essentially just classes) derived from the one given in [1]. For *NanoJava*, an operational semantics is given as well as a Hoare logic, which is proved both sound and (relatively) complete. The Hoare logic supports side-effecting expressions and implements a new approach for handling auxiliary variables. A more complex Hoare logic covering a much larger subset of Java is described in [3]. See also the homepage of project Bali at `https://isabelle.in.tum.de/Bali/` and the conference version of this document [2].

Contents

1 Statements and expression emulations **3**

2 Types, class Declarations, and whole programs **3**

3 Type relations **4**
3.1 Declarations and properties not used in the meta theory 5

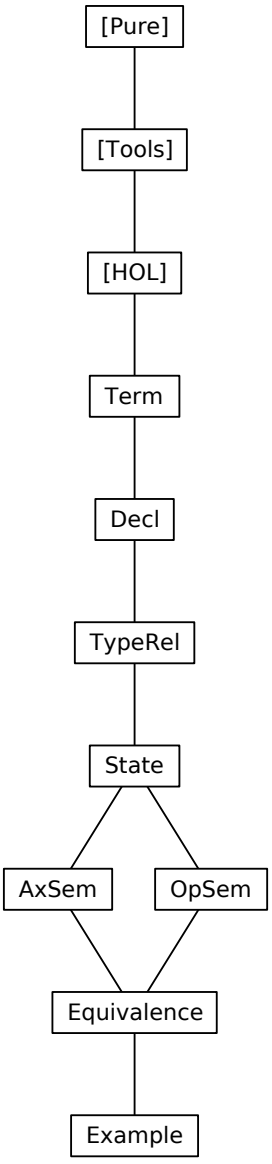
4 Program State **6**
4.1 Properties not used in the meta theory 8

5 Operational Evaluation Semantics **9**

6 Axiomatic Semantics **11**
6.1 Hoare Logic Rules 11
6.2 Fully polymorphic variants, required for Example only 13
6.3 Derived Rules 13

7 Equivalence of Operational and Axiomatic Semantics **15**
7.1 Validity 15
7.2 Soundness 15
7.3 (Relative) Completeness 17

8 Example **20**
8.1 Program representation 20
8.2 "atleast" relation for interpretation of Nat "values" 21
8.3 Proof(s) using the Hoare logic 22


[Pure]
[Tools]
[HOL]
Term
Decl
TypeRel
State
AxSem
OpSem
Equivalence
Example

1 Statements and expression emulations

theory *Term* **imports** *Main* **begin**

typedecl *cname* — class name
typedecl *mname* — method name
typedecl *fname* — field name
typedecl *vname* — variable name

axiomatization
This — This pointer
Par — method parameter
Res :: vname — method result
— Inequality axioms are not required for the meta theory.

datatype *stmt*
= *Skip* — empty statement
| *Comp stmt stmt* (<*_;; _*> [*91,90] 90*)
| *Cond expr stmt stmt* (<*If '(_') _ Else _*> [*3,91,91*] *91*)
| *Loop vname stmt* (<*While '(_') _*> [*3,91] 91*)
| *LAss vname expr* (<*_ :== _*> [*99, 95*] *94*) — local assignment
| *FAss expr fname expr* (<*_.._:==_*> [*95,99,95*] *94*) — field assignment
| *Meth "cname × mname"* — virtual method
| *Impl "cname × mname"* — method implementation
and *expr*
= *NewC cname* (<*new _*> [*99*] *95*) — object creation
| *Cast cname expr* — type cast
| *LAcc vname* — local access
| *FAcc expr fname* (<*_.._*> [*95,99*] *95*) — field access
| *Call cname expr mname expr*
(<*{_}_.._'(_')*> [*99,95,99,95*] *95*) — method call

end

2 Types, class Declarations, and whole programs

theory *Decl* **imports** *Term* **begin**

datatype *ty*
= *NT* — null type
| *Class cname* — class type

Field declaration

type_synonym *fdecl*
= *"fname × ty"*

record *methd*
= *par :: ty*
res :: ty
lcl ::"(vname × ty) list"
bdy :: stmt

Method declaration

type_synonym *mdecl*
= *"mname × methd"*

record *"class"*

```
        = super   :: cname
          flds    ::"fdecl list"
          methods ::"mdecl list"
```

Class declaration

```
type_synonym cdecl
        = "cname × class"

type_synonym prog
        = "cdecl list"

translations
  (type) "fdecl" ↽ (type) "fname × ty"
  (type) "mdecl" ↽ (type) "mname × ty × ty × stmt"
  (type) "class" ↽ (type) "cname × fdecl list × mdecl list"
  (type) "cdecl" ↽ (type) "cname × class"
  (type) "prog " ↽ (type) "cdecl list"

axiomatization
  Prog    :: prog        — program as a global value
and
  Object  :: cname       — name of root class


definition "class" :: "cname ⇀ class" where
 "class      ≡ map_of Prog"

definition is_class   :: "cname => bool" where
 "is_class C ≡ class C ≠ None"

lemma finite_is_class: "finite {C. is_class C}"
apply (unfold is_class_def class_def)
apply (fold dom_def)
apply (rule finite_dom_map_of)
done

end
```

3 Type relations

```
theory TypeRel
imports Decl
begin
```

Direct subclass relation

```
definition subcls1 :: "(cname × cname) set"
where
  "subcls1 ≡ {(C,D). C≠Object ∧ (∃c. class C = Some c ∧ super c=D)}"

abbreviation
  subcls1_syntax :: "[cname, cname] => bool"  (<_ ≺C1 _> [71,71] 70)
  where "C ≺C1 D == (C,D) ∈ subcls1"
abbreviation
  subcls_syntax  :: "[cname, cname] => bool" (<_ ⪯C _>  [71,71] 70)
  where "C ⪯C D ≡ (C,D) ∈ subcls1*"
```

3.1 Declarations and properties not used in the meta theory

Widening, viz. method invocation conversion

```
inductive
  widen :: "ty => ty => bool"  (<_ ≼ _> [71,71] 70)
where
  refl [intro!, simp]: "T ≼ T"
| subcls: "C≺C D ⟹ Class C ≼ Class D"
| null [intro!]: "NT ≼ R"

lemma subcls1D:
  "C≺C1D ⟹ C ≠ Object ∧ (∃c. class C = Some c ∧ super c=D)"
apply (unfold subcls1_def)
apply auto
done

lemma subcls1I: "⟦class C = Some m; super m = D; C ≠ Object⟧ ⟹ C≺C1D"
apply (unfold subcls1_def)
apply auto
done

lemma subcls1_def2:
  "subcls1 =
    (SIGMA C: {C. is_class C} . {D. C≠Object ∧ super (the (class C)) = D})"
apply (unfold subcls1_def is_class_def)
apply (auto split:if_split_asm)
done

lemma finite_subcls1: "finite subcls1"
apply(subst subcls1_def2)
apply(rule finite_SigmaI [OF finite_is_class])
apply(rule_tac B = "{super (the (class C))}" in finite_subset)
apply  auto
done

definition ws_prog :: "bool" where
 "ws_prog ≡ ∀(C,c)∈set Prog. C≠Object ⟶
                              is_class (super c) ∧ (super c,C)∉subcls1⁺"

lemma ws_progD: "⟦class C = Some c; C≠Object; ws_prog⟧ ⟹
  is_class (super c) ∧ (super c,C)∉subcls1⁺"
apply (unfold ws_prog_def class_def)
apply (drule_tac map_of_SomeD)
apply auto
done

lemma subcls1_irrefl_lemma1: "ws_prog ⟹ subcls1⁻¹ ∩ subcls1⁺ = {}"
by (fast dest: subcls1D ws_progD)


lemma irrefl_tranclI': "r⁻¹ ∩ r⁺ = {} ⟹ ∀x. (x, x) ∉ r⁺"
by(blast elim: tranclE dest: trancl_into_rtrancl)


lemmas subcls1_irrefl_lemma2 = subcls1_irrefl_lemma1 [THEN irrefl_tranclI']

lemma subcls1_irrefl: "⟦(x, y) ∈ subcls1; ws_prog⟧ ⟹ x ≠ y"
apply (rule irrefl_trancl_rD)
apply (rule subcls1_irrefl_lemma2)
```

apply *auto*
done

lemmas *subcls1_acyclic = subcls1_irrefl_lemma2 [THEN acyclicI]*

lemma *wf_subcls1: "ws_prog ⟹ wf (subcls1^{-1})"*
by *(auto intro: finite_acyclic_wf_converse finite_subcls1 subcls1_acyclic)*

definition *class_rec ::"cname ⇒ (class ⇒ ('a × 'b) list) ⇒ ('a ⇀ 'b)"*
where
"class_rec ≡ wfrec (subcls1^{-1}) (λrec C f.
case class C of None ⇒ undefined
| Some m ⇒ (if C = Object then Map.empty else rec (super m) f) ++ map_of (f m))"

lemma *class_rec: "⟦class C = Some m; ws_prog⟧ ⟹*
class_rec C f = (if C = Object then Map.empty else class_rec (super m) f) ++
map_of (f m)"
apply *(drule wf_subcls1)*
apply *(subst def_wfrec[OF class_rec_def], auto)*
apply *(subst cut_apply, auto intro: subcls1I)*
done

— Methods of a class, with inheritance and hiding
definition *"method" :: "cname => (mname ⇀ methd)"* **where**
"method C ≡ class_rec C methods"

lemma *method_rec: "⟦class C = Some m; ws_prog⟧ ⟹*
method C = (if C=Object then Map.empty else method (super m)) ++ map_of (methods m)"
apply *(unfold method_def)*
apply *(erule (1) class_rec [THEN trans])*
apply *simp*
done

— Fields of a class, with inheritance and hiding
definition *field :: "cname => (fname ⇀ ty)"* **where**
"field C ≡ class_rec C flds"

lemma *flds_rec: "⟦class C = Some m; ws_prog⟧ ⟹*
field C = (if C=Object then Map.empty else field (super m)) ++ map_of (flds m)"
apply *(unfold field_def)*
apply *(erule (1) class_rec [THEN trans])*
apply *simp*
done

end

4 Program State

theory *State* **imports** *TypeRel* **begin**

definition *body :: "cname × mname => stmt"* **where**
"body ≡ λ(C,m). bdy (the (method C m))"

Locations, i.e. abstract references to objects

typedecl *loc*

datatype *val*

```
  = Null          — null reference
  | Addr loc      — address, i.e. location of object

type_synonym fields
        = "(fname ⇀ val)"

type_synonym
        obj = "cname × fields"

translations
  (type) "fields" ↽ (type) "fname => val option"
  (type) "obj"    ↽ (type) "cname × fields"

definition init_vars :: "('a ⇀ 'b) => ('a ⇀ val)" where
 "init_vars m == map_option (λT. Null) o m"
```

private:

```
type_synonym heap = "loc   ⇀ obj"
type_synonym locals = "vname ⇀ val"
```

private:

```
record  state
        = heap   :: heap
          locals :: locals

translations
  (type) "heap" ↽ (type) "loc => obj option"
  (type) "locals" ↽ (type) "vname => val option"
  (type) "state" ↽ (type) "(|heap :: heap, locals :: locals|)"

definition del_locs :: "state => state" where
 "del_locs s ≡ s (| locals := Map.empty |)"

definition init_locs     :: "cname => mname => state => state" where
 "init_locs C m s ≡ s (| locals := locals s ++
                         init_vars (map_of (lcl (the (method C m)))) |)"
```

The first parameter of `set_locs` is of type `state` rather than `locals` in order to keep `locals` private.

```
definition set_locs :: "state => state => state" where
 "set_locs s s' ≡ s' (| locals := locals s |)"

definition get_local     :: "state => vname => val" (‹_<_›> [99,0] 99) where
 "get_local s x  ≡ the (locals s x)"
```

— local function:

```
definition get_obj       :: "state => loc => obj" where
 "get_obj s a ≡ the (heap s a)"

definition obj_class     :: "state => loc => cname" where
 "obj_class s a ≡ fst (get_obj s a)"

definition get_field     :: "state => loc => fname => val" where
 "get_field s a f ≡ the (snd (get_obj s a) f)"
```

— local function:

```
definition hupd       :: "loc => obj => state => state"   (‹hupd'(_↦_')› [10,10] 1000) where
 "hupd a obj s ≡ s (| heap   := ((heap   s)(a↦obj))|)"
```

definition *lupd :: "vname => val => state => state" (‹lupd'(_↦_')› [10,10] 1000)* **where**
"lupd x v s ≡ s (| locals := ((locals s)(x↦v))|)"

definition *new_obj :: "loc => cname => state => state"* **where**
"new_obj a C ≡ hupd(a↦(C,init_vars (field C)))"

definition *upd_obj :: "loc => fname => val => state => state"* **where**
"upd_obj a f v s ≡ let (C,fs) = the (heap s a) in hupd(a↦(C,fs(f↦v))) s"

definition *new_Addr :: "state => val"* **where**
"new_Addr s == SOME v. (∃a. v = Addr a ∧ (heap s) a = None) | v = Null"

4.1 Properties not used in the meta theory

lemma *locals_upd_id [simp]: "s(|locals := locals s|) = s"*
by *simp*

lemma *lupd_get_local_same [simp]: "lupd(x↦v) s<x> = v"*
by *(simp add: lupd_def get_local_def)*

lemma *lupd_get_local_other [simp]: "x ≠ y ⟹ lupd(x↦v) s<y> = s<y>"*
apply *(drule not_sym)*
by *(simp add: lupd_def get_local_def)*

lemma *get_field_lupd [simp]:*
"get_field (lupd(x↦y) s) a f = get_field s a f"
by *(simp add: lupd_def get_field_def get_obj_def)*

lemma *get_field_set_locs [simp]:*
"get_field (set_locs l s) a f = get_field s a f"
by *(simp add: lupd_def get_field_def set_locs_def get_obj_def)*

lemma *get_field_del_locs [simp]:*
"get_field (del_locs s) a f = get_field s a f"
by *(simp add: lupd_def get_field_def del_locs_def get_obj_def)*

lemma *new_obj_get_local [simp]: "new_obj a C s <x> = s<x>"*
by *(simp add: new_obj_def hupd_def get_local_def)*

lemma *heap_lupd [simp]: "heap (lupd(x↦y) s) = heap s"*
by *(simp add: lupd_def)*

lemma *heap_hupd_same [simp]: "heap (hupd(a↦obj) s) a = Some obj"*
by *(simp add: hupd_def)*

lemma *heap_hupd_other [simp]: "aa ≠ a ⟹ heap (hupd(aa↦obj) s) a = heap s a"*
apply *(drule not_sym)*
by *(simp add: hupd_def)*

lemma *hupd_hupd [simp]: "hupd(a↦obj) (hupd(a↦obj') s) = hupd(a↦obj) s"*
by *(simp add: hupd_def)*

lemma *heap_del_locs [simp]: "heap (del_locs s) = heap s"*
by *(simp add: del_locs_def)*

lemma *heap_set_locs [simp]: "heap (set_locs l s) = heap s"*
by *(simp add: set_locs_def)*

lemma *hupd_lupd [simp]:*

```
  "hupd(a↦obj) (lupd(x↦y) s) = lupd(x↦y) (hupd(a↦obj) s)"
by (simp add: hupd_def lupd_def)

lemma hupd_del_locs [simp]:
  "hupd(a↦obj) (del_locs s) = del_locs (hupd(a↦obj) s)"
by (simp add: hupd_def del_locs_def)

lemma new_obj_lupd [simp]:
  "new_obj a C (lupd(x↦y) s) = lupd(x↦y) (new_obj a C s)"
by (simp add: new_obj_def)

lemma new_obj_del_locs [simp]:
  "new_obj a C (del_locs s) = del_locs (new_obj a C s)"
by (simp add: new_obj_def)

lemma upd_obj_lupd [simp]:
  "upd_obj a f v (lupd(x↦y) s) = lupd(x↦y) (upd_obj a f v s)"
by (simp add: upd_obj_def Let_def split_beta)

lemma upd_obj_del_locs [simp]:
  "upd_obj a f v (del_locs s) = del_locs (upd_obj a f v s)"
by (simp add: upd_obj_def Let_def split_beta)

lemma get_field_hupd_same [simp]:
 "get_field (hupd(a↦(C, fs)) s) a = the ∘ fs"
apply (rule ext)
by (simp add: get_field_def get_obj_def)

lemma get_field_hupd_other [simp]:
 "aa ≠ a  ⟹ get_field (hupd(aa↦obj) s) a = get_field s a"
apply (rule ext)
by (simp add: get_field_def get_obj_def)

lemma new_AddrD:
"new_Addr s = v ⟹ (∃a. v = Addr a ∧ heap s a = None) | v = Null"
apply (unfold new_Addr_def)
apply (erule subst)
apply (rule someI)
apply (rule disjI2)
apply (rule HOL.refl)
done

end
```

5 Operational Evaluation Semantics

```
theory OpSem imports State begin

inductive
  exec :: "[state,stmt,    nat,state] => bool" (⟨_ -_-_→ _⟩  [98,90,   65,98] 89)
  and eval :: "[state,expr,val,nat,state] => bool" (⟨_ -_≻_-_→ _⟩[98,95,99,65,98] 89)
where
  Skip: "   s -Skip-n→ s"

| Comp: "[| s0 -c1-n→ s1; s1 -c2-n→ s2 |] ==>
           s0 -c1;; c2-n→ s2"

| Cond: "[| s0 -e≻v-n→ s1; s1 -(if v≠Null then c1 else c2)-n→ s2 |] ==>
```

```
            s0 -If(e) c1 Else c2-n→ s2"

| LoopF:"   s0<x> = Null ==>
            s0 -While(x) c-n→ s0"
| LoopT:"[| s0<x> ≠ Null; s0 -c-n→ s1; s1 -While(x) c-n→ s2 |] ==>
            s0 -While(x) c-n→ s2"

| LAcc: "   s -LAcc x≻s<x>-n→ s"

| LAss: "   s -e≻v-n→ s' ==>
            s -x:==e-n→ lupd(x↦v) s'"

| FAcc: "   s -e≻Addr a-n→ s' ==>
            s -e..f≻get_field s' a f-n→ s'"

| FAss: "[| s0 -e1≻Addr a-n→ s1;  s1 -e2≻v-n→ s2 |] ==>
            s0 -e1..f:==e2-n→ upd_obj a f v s2"

| NewC: "   new_Addr s = Addr a ==>
            s -new C≻Addr a-n→ new_obj a C s"

| Cast: "[| s -e≻v-n→ s';
            case v of Null => True | Addr a => obj_class s' a ≼C C |] ==>
            s -Cast C e≻v-n→ s'"

| Call: "[| s0 -e1≻a-n→ s1; s1 -e2≻p-n→ s2;
            lupd(This↦a)(lupd(Par↦p)(del_locs s2)) -Meth (C,m)-n→ s3
     |] ==> s0 -{C}e1..m(e2)≻s3<Res>-n→ set_locs s2 s3"

| Meth: "[| s<This> = Addr a; D = obj_class s a; D≼C C;
            init_locs D m s -Impl (D,m)-n→ s' |] ==>
            s -Meth (C,m)-n→ s'"

| Impl: "   s -body Cm-    n→ s' ==>
            s -Impl Cm-Suc n→ s'"


inductive_cases exec_elim_cases':
                                "s -Skip            -n→ t"
                                "s -c1;; c2         -n→ t"
                                "s -If(e) c1 Else c2-n→ t"
                                "s -While(x) c      -n→ t"
                                "s -x:==e           -n→ t"
                                "s -e1..f:==e2      -n→ t"
inductive_cases Meth_elim_cases:  "s -Meth Cm         -n→ t"
inductive_cases Impl_elim_cases:  "s -Impl Cm         -n→ t"
lemmas exec_elim_cases = exec_elim_cases' Meth_elim_cases Impl_elim_cases
inductive_cases eval_elim_cases:
                                "s -new C         ≻v-n→ t"
                                "s -Cast C e      ≻v-n→ t"
                                "s -LAcc x        ≻v-n→ t"
                                "s -e..f          ≻v-n→ t"
                                "s -{C}e1..m(e2)  ≻v-n→ t"

lemma exec_eval_mono [rule_format]:
  "(s -c  -n→ t ⟶ (∀m. n ≤ m ⟶ s -c  -m→ t)) ∧
   (s -e≻v-n→ t ⟶ (∀m. n ≤ m ⟶ s -e≻v-m→ t))"
apply (rule exec_eval.induct)
prefer 14
```

```
apply clarify
apply (rename_tac n)
apply (case_tac n)
apply (blast intro:exec_eval.intros)+
done
lemmas exec_mono = exec_eval_mono [THEN conjunct1, rule_format]
lemmas eval_mono = exec_eval_mono [THEN conjunct2, rule_format]

lemma exec_exec_max: "⟦s1 -c1-    n1   → t1 ; s2 -c2-       n2→ t2⟧ ⟹
                      s1 -c1-max n1 n2→ t1 ∧ s2 -c2-max n1 n2→ t2"
by (fast intro: exec_mono max.cobounded1 max.cobounded2)

lemma eval_exec_max: "⟦s1 -c-    n1   → t1 ; s2 -e≻v-       n2→ t2⟧ ⟹
                      s1 -c-max n1 n2→ t1 ∧ s2 -e≻v-max n1 n2→ t2"
by (fast intro: eval_mono exec_mono max.cobounded1 max.cobounded2)

lemma eval_eval_max: "⟦s1 -e1≻v1-    n1   → t1 ; s2 -e2≻v2-       n2→ t2⟧ ⟹
                      s1 -e1≻v1-max n1 n2→ t1 ∧ s2 -e2≻v2-max n1 n2→ t2"
by (fast intro: eval_mono max.cobounded1 max.cobounded2)

lemma eval_eval_exec_max:
 "⟦s1 -e1≻v1-n1→ t1; s2 -e2≻v2-n2→ t2; s3 -c-n3→ t3⟧ ⟹
   s1 -e1≻v1-max (max n1 n2) n3→ t1 ∧
   s2 -e2≻v2-max (max n1 n2) n3→ t2 ∧
   s3 -c    -max (max n1 n2) n3→ t3"
apply (drule (1) eval_eval_max, erule thin_rl)
by (fast intro: exec_mono eval_mono max.cobounded1 max.cobounded2)

lemma Impl_body_eq: "(λt. ∃n. Z -Impl M-n→ t) = (λt. ∃n. Z -body M-n→ t)"
apply (rule ext)
apply (fast elim: exec_elim_cases intro: exec_eval.Impl)
done

end
```

6 Axiomatic Semantics

```
theory AxSem imports State begin

type_synonym assn = "state => bool"
type_synonym vassn = "val => assn"
type_synonym triple = "assn × stmt ×  assn"
type_synonym etriple = "assn × expr × vassn"
translations
  (type) "assn" ↽ (type) "state => bool"
  (type) "vassn" ↽ (type) "val => assn"
  (type) "triple" ↽ (type) "assn × stmt × assn"
  (type) "etriple" ↽ (type) "assn × expr × vassn"
```

6.1 Hoare Logic Rules

```
inductive
 hoare :: "[triple set, triple set] => bool"  (‹_ |⊢/ _› [61, 61] 60)
 and ehoare :: "[triple set, etriple] => bool"  (‹_ |⊢e/ _› [61, 61] 60)
 and hoare1 :: "[triple set, assn,stmt,assn] => bool"
   (‹_ ⊢/ ({(1_)}/ (_)/ {(1_)})› [61, 3, 90, 3] 60)
 and ehoare1 :: "[triple set, assn,expr,vassn]=> bool"
   (‹_ ⊢e/ ({(1_)}/ (_)/ {(1_)})› [61, 3, 90, 3] 60)
```

where

```
  "A  ⊢ {P}c{Q} ≡ A |⊢ {(P,c,Q)}"
| "A  ⊢_e {P}e{Q} ≡ A |⊢_e (P,e,Q)"

| Skip:  "A ⊢ {P} Skip {P}"

| Comp: "[| A ⊢ {P} c1 {Q}; A ⊢ {Q} c2 {R} |] ==> A ⊢ {P} c1;;c2 {R}"

| Cond: "[| A ⊢_e {P} e {Q};
           ∀v. A ⊢ {Q v} (if v ≠ Null then c1 else c2) {R} |] ==>
           A ⊢ {P} If(e) c1 Else c2 {R}"

| Loop: "A ⊢ {λs. P s ∧ s<x> ≠ Null} c {P} ==>
         A ⊢ {P} While(x) c {λs. P s ∧ s<x> = Null}"

| LAcc: "A ⊢_e {λs. P (s<x>) s} LAcc x {P}"

| LAss: "A ⊢_e {P} e {λv s.  Q (lupd(x↦v) s)} ==>
         A ⊢  {P} x:==e {Q}"

| FAcc: "A ⊢_e {P} e {λv s. ∀a. v=Addr a --> Q (get_field s a f) s} ==>
         A ⊢_e {P} e..f {Q}"

| FAss: "[| A ⊢_e {P} e1 {λv s. ∀a. v=Addr a --> Q a s};
        ∀a. A ⊢_e {Q a} e2 {λv s. R (upd_obj a f v s)} |] ==>
           A ⊢  {P} e1..f:==e2 {R}"

| NewC: "A ⊢_e {λs. ∀a. new_Addr s = Addr a --> P (Addr a) (new_obj a C s)}
                 new C {P}"

| Cast: "A ⊢_e {P} e {λv s. (case v of Null => True
                                | Addr a => obj_class s a ≼C C) --> Q v s} ==>
         A ⊢_e {P} Cast C e {Q}"

| Call: "[| A ⊢_e {P} e1 {Q}; ∀a. A ⊢_e {Q a} e2 {R a};
    ∀a p ls. A ⊢ {λs'. ∃s. R a p s ∧ ls = s ∧
                    s' = lupd(This↦a)(lupd(Par↦p)(del_locs s))}
                  Meth (C,m) {λs. S (s<Res>) (set_locs ls s)} |] ==>
             A ⊢_e {P} {C}e1..m(e2) {S}"

| Meth: "∀D. A ⊢ {λs'. ∃s a. s<This> = Addr a ∧ D = obj_class s a ∧ D ≼C C ∧
                       P s ∧ s' = init_locs D m s}
                  Impl (D,m) {Q} ==>
             A ⊢ {P} Meth (C,m) {Q}"
```

— $\bigcup Z$ instead of $\forall Z$ in the conclusion and
Z restricted to type state due to limitations of the inductive package

```
| Impl: "∀Z::state. A∪ (⋃Z. (λCm. (P Z Cm, Impl Cm, Q Z Cm))‘Ms) |⊢
                           (λCm. (P Z Cm, body Cm, Q Z Cm))‘Ms ==>
                     A |⊢ (λCm. (P Z Cm, Impl Cm, Q Z Cm))‘Ms"
```

— structural rules

```
| Asm:  "   a ∈ A ==> A |⊢ {a}"

| ConjI: " ∀c ∈ C. A |⊢ {c} ==> A |⊢ C"

| ConjE: "[|A |⊢ C; c ∈ C |] ==> A |⊢ {c}"
```

— Z restricted to type state due to limitations of the inductive package

```
| Conseq:"[| ∀Z::state. A ⊢ {P' Z} c {Q' Z};
            ∀s t. (∀Z. P' Z s --> Q' Z t) --> (P s --> Q t) |] ==>
           A ⊢ {P} c {Q }"
```

— Z restricted to type state due to limitations of the inductive package

```
| eConseq:"[| ∀Z::state. A ⊢e {P' Z} e {Q' Z};
            ∀s v t. (∀Z. P' Z s --> Q' Z v t) --> (P s --> Q v t) |] ==>
           A ⊢e {P} e {Q }"
```

6.2 Fully polymorphic variants, required for Example only

axiomatization where

```
  Conseq:"[| ∀Z. A ⊢ {P' Z} c {Q' Z};
            ∀s t. (∀Z. P' Z s --> Q' Z t) --> (P s --> Q t) |] ==>
               A ⊢ {P} c {Q }"
```

axiomatization where

```
  eConseq:"[| ∀Z. A ⊢e {P' Z} e {Q' Z};
            ∀s v t. (∀Z. P' Z s --> Q' Z v t) --> (P s --> Q v t) |] ==>
               A ⊢e {P} e {Q }"
```

axiomatization where

```
  Impl: "∀Z. A∪ (⋃Z. (λCm. (P Z Cm, Impl Cm, Q Z Cm))‘Ms) |⊢
                          (λCm. (P Z Cm, body Cm, Q Z Cm))‘Ms ==>
                    A |⊢ (λCm. (P Z Cm, Impl Cm, Q Z Cm))‘Ms"
```

6.3 Derived Rules

lemma *Conseq1:* "⟦A ⊢ {P'} c {Q}; ∀s. P s ⟶ P' s⟧ ⟹ A ⊢ {P} c {Q}"
apply *(rule hoare_ehoare.Conseq)*
apply *(rule allI, assumption)*
apply *fast*
done

lemma *Conseq2:* "⟦A ⊢ {P} c {Q'}; ∀t. Q' t ⟶ Q t⟧ ⟹ A ⊢ {P} c {Q}"
apply *(rule hoare_ehoare.Conseq)*
apply *(rule allI, assumption)*
apply *fast*
done

lemma *eConseq1:* "⟦A ⊢e {P'} e {Q}; ∀s. P s ⟶ P' s⟧ ⟹ A ⊢e {P} e {Q}"
apply *(rule hoare_ehoare.eConseq)*
apply *(rule allI, assumption)*
apply *fast*
done

lemma *eConseq2:* "⟦A ⊢e {P} e {Q'}; ∀v t. Q' v t ⟶ Q v t⟧ ⟹ A ⊢e {P} e {Q}"
apply *(rule hoare_ehoare.eConseq)*
apply *(rule allI, assumption)*
apply *fast*
done

lemma *Weaken:* "⟦A |⊢ C'; C ⊆ C'⟧ ⟹ A |⊢ C"
apply *(rule hoare_ehoare.ConjI)*
apply *clarify*
apply *(drule hoare_ehoare.ConjE)*
apply *fast*

```
apply assumption
done

lemma Thin_lemma:
  "(A' |⊢  C          ⟶ (∀A. A' ⊆ A ⟶ A |⊢  C       )) ∧
   (A'  ⊢e {P} e {Q} ⟶ (∀A. A' ⊆ A ⟶ A  ⊢e {P} e {Q}))"
apply (rule hoare_ehoare.induct)
apply (tactic "ALLGOALS(EVERY'[clarify_tac context, REPEAT o smp_tac context 1])")
apply (blast intro: hoare_ehoare.Skip)
apply (blast intro: hoare_ehoare.Comp)
apply (blast intro: hoare_ehoare.Cond)
apply (blast intro: hoare_ehoare.Loop)
apply (blast intro: hoare_ehoare.LAcc)
apply (blast intro: hoare_ehoare.LAss)
apply (blast intro: hoare_ehoare.FAcc)
apply (blast intro: hoare_ehoare.FAss)
apply (blast intro: hoare_ehoare.NewC)
apply (blast intro: hoare_ehoare.Cast)
apply (erule hoare_ehoare.Call)
apply  (rule, drule spec, erule conjE, tactic "smp_tac context 1 1", assumption)
apply  blast
apply (blast intro!: hoare_ehoare.Meth)
apply (blast intro!: hoare_ehoare.Impl)
apply (blast intro!: hoare_ehoare.Asm)
apply (blast intro: hoare_ehoare.ConjI)
apply (blast intro: hoare_ehoare.ConjE)
apply (rule hoare_ehoare.Conseq)
apply  (rule, drule spec, erule conjE, tactic "smp_tac context 1 1", assumption+)
apply (rule hoare_ehoare.eConseq)
apply  (rule, drule spec, erule conjE, tactic "smp_tac context 1 1", assumption+)
done

lemma cThin: "⟦A' |⊢ C; A' ⊆ A⟧ ⟹ A |⊢ C"
by (erule (1) conjunct1 [OF Thin_lemma, rule_format])

lemma eThin: "⟦A' ⊢e {P} e {Q}; A' ⊆ A⟧ ⟹ A ⊢e {P} e {Q}"
by (erule (1) conjunct2 [OF Thin_lemma, rule_format])


lemma Union: "A |⊢ (⋃Z. C Z) = (∀Z. A |⊢ C Z)"
by (auto intro: hoare_ehoare.ConjI hoare_ehoare.ConjE)

lemma Impl1':
   "⟦∀Z::state. A∪ (⋃Z. (λCm. (P Z Cm, Impl Cm, Q Z Cm))‘Ms) |⊢
                (λCm. (P Z Cm, body Cm, Q Z Cm))‘Ms;
    Cm ∈ Ms⟧ ⟹
              A   ⊢  {P Z Cm} Impl Cm {Q Z Cm}"
apply (drule AxSem.Impl)
apply (erule Weaken)
apply (auto del: image_eqI intro: rev_image_eqI)
done

lemmas Impl1 = AxSem.Impl [of _ _ _ "{Cm}", simplified] for Cm

end
```

7 Equivalence of Operational and Axiomatic Semantics

theory *Equivalence* **imports** *OpSem AxSem* **begin**

7.1 Validity

definition *valid :: "[assn,stmt, assn] => bool" (⟨⊨ {(1_)}/ (_)/ {(1_)}⟩ [3,90,3] 60)* **where**
"⊨ {P} c {Q} ≡ ∀s t. P s --> (∃n. s -c -n→ t) --> Q t"

definition *evalid :: "[assn,expr,vassn] => bool" (⟨⊨e {(1_)}/ (_)/ {(1_)}⟩ [3,90,3] 60)* **where**
"⊨e {P} e {Q} ≡ ∀s v t. P s --> (∃n. s -e≻v-n→ t) --> Q v t"

definition *nvalid :: "[nat, triple] => bool" (⟨⊨_: _⟩ [61,61] 60)* **where**
"⊨n: t ≡ let (P,c,Q) = t in ∀s t. s -c -n→ t --> P s --> Q t"

definition *envalid :: "[nat,etriple] => bool" (⟨⊨_:e _⟩ [61,61] 60)* **where**
"⊨n:e t ≡ let (P,e,Q) = t in ∀s v t. s -e≻v-n→ t --> P s --> Q v t"

definition *nvalids :: "[nat, triple set] => bool" (⟨|⊨_: _⟩ [61,61] 60)* **where**
"|⊨n: T ≡ ∀t∈T. ⊨n: t"

definition *cnvalids :: "[triple set,triple set] => bool" (⟨_ |⊨/ _⟩ [61,61] 60)* **where**
"A |⊨ C ≡ ∀n. |⊨n: A --> |⊨n: C"

definition *cenvalid :: "[triple set,etriple] => bool" (⟨_ |⊨e/ _⟩[61,61] 60)* **where**
"A |⊨e t ≡ ∀n. |⊨n: A --> ⊨n:e t"

lemma *nvalid_def2: "⊨n: (P,c,Q) ≡ ∀s t. s -c-n→ t ⟶ P s ⟶ Q t"*
by *(simp add: nvalid_def Let_def)*

lemma *valid_def2: "⊨ {P} c {Q} = (∀n. ⊨n: (P,c,Q))"*
apply *(simp add: valid_def nvalid_def2)*
apply *blast*
done

lemma *envalid_def2: "⊨n:e (P,e,Q) ≡ ∀s v t. s -e≻v-n→ t ⟶ P s ⟶ Q v t"*
by *(simp add: envalid_def Let_def)*

lemma *evalid_def2: "⊨e {P} e {Q} = (∀n. ⊨n:e (P,e,Q))"*
apply *(simp add: evalid_def envalid_def2)*
apply *blast*
done

lemma *cenvalid_def2:*
"A|⊨e (P,e,Q) = (∀n. |⊨n: A ⟶ (∀s v t. s -e≻v-n→ t ⟶ P s ⟶ Q v t))"
by*(simp add: cenvalid_def envalid_def2)*

7.2 Soundness

declare *exec_elim_cases [elim!] eval_elim_cases [elim!]*

lemma *Impl_nvalid_0: "⊨0: (P,Impl M,Q)"*
by *(clarsimp simp add: nvalid_def2)*

lemma *Impl_nvalid_Suc: "⊨n: (P,body M,Q) ⟹ ⊨Suc n: (P,Impl M,Q)"*
by *(clarsimp simp add: nvalid_def2)*

lemma *nvalid_SucD: "⋀t. ⊨Suc n:t ⟹ ⊨n:t"*
by *(force simp add: split_paired_all nvalid_def2 intro: exec_mono)*

```
lemma nvalids_SucD: "Ball A (nvalid (Suc n)) ⟹  Ball A (nvalid n)"
by (fast intro: nvalid_SucD)

lemma Loop_sound_lemma [rule_format (no_asm)]:
"∀s t. s -c-n→ t ⟶ P s ∧ s<x> ≠ Null ⟶ P t ⟹
  (s -c0-n0→ t ⟶ P s ⟶ c0 = While (x) c ⟶ n0 = n ⟶ P t ∧ t<x> = Null)"
apply (rule_tac ?P2.1="%s e v n t. True" in exec_eval.induct [THEN conjunct1])
apply clarsimp+
done

lemma Impl_sound_lemma:
"⟦∀z n. Ball (A ∪ B) (nvalid n) ⟶ Ball (f z ‘ Ms) (nvalid n);
  Cm∈Ms; Ball A (nvalid na); Ball B (nvalid na)⟧ ⟹ nvalid na (f z Cm)"
by blast

lemma all_conjunct2: "∀l. P' l ∧ P l ⟹ ∀l. P l"
by fast

lemma all3_conjunct2:
  "∀a p l. (P' a p l ∧ P a p l) ⟹ ∀a p l. P a p l"
by fast

lemma cnvalid1_eq:
  "A |⊨ {(P,c,Q)} ≡ ∀n. |⊨n: A ⟶ (∀s t. s -c-n→ t ⟶ P s ⟶ Q t)"
by(simp add: cnvalids_def nvalids_def nvalid_def2)

lemma hoare_sound_main:"⋀t. (A |⊢ C ⟶ A |⊨ C) ∧ (A |⊢e t ⟶ A |⊨e t)"
apply (tactic "split_all_tac context 1", rename_tac P e Q)
apply (rule hoare_ehoare.induct)

apply (tactic <ALLGOALS (REPEAT o dresolve_tac context [@{thm all_conjunct2}, @{thm all3_conjunct2}
apply (tactic <ALLGOALS (REPEAT o Rule_Insts.thin_tac context "hoare _ _" [])>)
apply (tactic <ALLGOALS (REPEAT o Rule_Insts.thin_tac context "ehoare _ _" [])>)
apply (simp_all only: cnvalid1_eq cenvalid_def2)
                 apply fast
                apply fast
               apply fast
              apply (clarify,tactic "smp_tac context 1 1",erule(2) Loop_sound_lemma,(rule HOL.refl)
             apply fast
            apply fast
           apply fast
          apply fast
         apply fast
        apply fast
       apply (clarsimp del: Meth_elim_cases)
      apply (force del: Impl_elim_cases)
     defer
     prefer 4 apply blast
    prefer 4 apply blast
   apply (simp_all (no_asm_use) only: cnvalids_def nvalids_def)
   apply blast
  apply blast
 apply blast
apply (rule allI)
apply (rule_tac x=Z in spec)
apply (induct_tac "n")
 apply  (clarify intro!: Impl_nvalid_0)
apply (clarify  intro!: Impl_nvalid_Suc)
```

```
apply (drule nvalids_SucD)
apply (simp only: HOL.all_simps)
apply (erule (1) impE)
apply (drule (2) Impl_sound_lemma)
 apply  blast
apply assumption
done

theorem hoare_sound: "{} ⊢ {P} c {Q} ⟹ ⊨ {P} c {Q}"
apply (simp only: valid_def2)
apply (drule hoare_sound_main [THEN conjunct1, rule_format])
apply (unfold cnvalids_def nvalids_def)
apply fast
done

theorem ehoare_sound: "{} ⊢e {P} e {Q} ⟹ ⊨e {P} e {Q}"
apply (simp only: evalid_def2)
apply (drule hoare_sound_main [THEN conjunct2, rule_format])
apply (unfold cenvalid_def nvalids_def)
apply fast
done
```

7.3 (Relative) Completeness

```
definition MGT :: "stmt => state => triple" where
         "MGT  c Z ≡ (λs. Z = s, c, λ  t. ∃n. Z -c-  n→ t)"

definition MGTe   :: "expr => state => etriple" where
         "MGTe e Z ≡ (λs. Z = s, e, λv t. ∃n. Z -e≻v-n→ t)"

lemma MGF_implies_complete:
 "∀Z. {} |⊢ { MGT c Z} ⟹ ⊨  {P} c {Q} ⟹ {} ⊢  {P} c {Q}"
apply (simp only: valid_def2)
apply (unfold MGT_def)
apply (erule hoare_ehoare.Conseq)
apply (clarsimp simp add: nvalid_def2)
done

lemma eMGF_implies_complete:
 "∀Z. {} |⊢e MGTe e Z ⟹ ⊨e {P} e {Q} ⟹ {} ⊢e {P} e {Q}"
apply (simp only: evalid_def2)
apply (unfold MGTe_def)
apply (erule hoare_ehoare.eConseq)
apply (clarsimp simp add: envalid_def2)
done

declare exec_eval.intros[intro!]

lemma MGF_Loop: "∀Z. A ⊢ {(=) Z} c {λt. ∃n. Z -c-n→ t} ⟹
  A ⊢ {(=) Z} While (x) c {λt. ∃n. Z -While (x) c-n→ t}"
apply (rule_tac P' = "λZ s. (Z,s) ∈ ({(s,t). ∃n. s<x> ≠ Null ∧ s -c-n→ t})*"
       in hoare_ehoare.Conseq)
apply  (rule allI)
apply  (rule hoare_ehoare.Loop)
apply  (erule hoare_ehoare.Conseq)
apply  clarsimp
apply  (blast intro:rtrancl_into_rtrancl)
apply (erule thin_rl)
apply clarsimp
```

```
apply (erule_tac x = Z in allE)
apply clarsimp
apply (erule converse_rtrancl_induct)
apply  blast
apply clarsimp
apply (drule (1) exec_exec_max)
apply (blast del: exec_elim_cases)
done

lemma MGF_lemma: "∀M Z. A |⊢ {MGT (Impl M) Z} ⟹
 (∀Z. A |⊢ {MGT c Z}) ∧ (∀Z. A |⊢e MGTe e Z)"
apply (simp add: MGT_def MGTe_def)
apply (rule stmt_expr.induct)
apply (rule_tac [!] allI)

apply (rule Conseq1 [OF hoare_ehoare.Skip])
apply blast

apply (rule hoare_ehoare.Comp)
apply  (erule spec)
apply (erule hoare_ehoare.Conseq)
apply clarsimp
apply (drule (1) exec_exec_max)
apply blast

apply (erule thin_rl)
apply (rule hoare_ehoare.Cond)
apply  (erule spec)
apply (rule allI)
apply (simp)
apply (rule conjI)
apply  (rule impI, erule hoare_ehoare.Conseq, clarsimp, drule (1) eval_exec_max,
        erule thin_rl, erule thin_rl, force)+

apply (erule MGF_Loop)

apply (erule hoare_ehoare.eConseq [THEN hoare_ehoare.LAss])
apply fast

apply (erule thin_rl)
apply (rename_tac expr1 u v Z, rule_tac Q = "λa s. ∃n. Z -expr1≻Addr a-n→ s" in hoare_ehoare.FAss
apply  (drule spec)
apply  (erule eConseq2)
apply  fast
apply (rule allI)
apply (erule hoare_ehoare.eConseq)
apply clarsimp
apply (drule (1) eval_eval_max)
apply blast

apply (simp only: split_paired_all)
apply (rule hoare_ehoare.Meth)
apply (rule allI)
apply (drule spec, drule spec, erule hoare_ehoare.Conseq)
apply blast

apply (simp add: split_paired_all)

apply (rule eConseq1 [OF hoare_ehoare.NewC])
```

```
apply blast

apply (erule hoare_ehoare.eConseq [THEN hoare_ehoare.Cast])
apply fast

apply (rule eConseq1 [OF hoare_ehoare.LAcc])
apply blast

apply (erule hoare_ehoare.eConseq [THEN hoare_ehoare.FAcc])
apply fast

apply (rename_tac expr1 u expr2 Z)
apply (rule_tac R = "λa v s. ∃n1 n2 t. Z -expr1≻a-n1→ t ∧ t -expr2≻v-n2→ s" in
               hoare_ehoare.Call)
apply  (erule spec)
apply  (rule allI)
apply  (erule hoare_ehoare.eConseq)
apply  clarsimp
apply  blast
apply (rule allI)+
apply (rule hoare_ehoare.Meth)
apply (rule allI)
apply (drule spec, drule spec, erule hoare_ehoare.Conseq)
apply (erule thin_rl, erule thin_rl)
apply (clarsimp del: Impl_elim_cases)
apply (drule (2) eval_eval_exec_max)
apply (force del: Impl_elim_cases)
done

lemma MGF_Impl: "{} |⊢ {MGT (Impl M) Z}"
apply (unfold MGT_def)
apply (rule Impl1')
apply  (rule_tac [2] UNIV_I)
apply clarsimp
apply (rule hoare_ehoare.ConjI)
apply clarsimp
apply (rule ssubst [OF Impl_body_eq])
apply (fold MGT_def)
apply (rule MGF_lemma [THEN conjunct1, rule_format])
apply (rule hoare_ehoare.Asm)
apply force
done

theorem hoare_relative_complete: "⊨ {P} c {Q} ⟹ {} ⊢ {P} c {Q}"
apply (rule MGF_implies_complete)
apply  (erule_tac [2] asm_rl)
apply (rule allI)
apply (rule MGF_lemma [THEN conjunct1, rule_format])
apply (rule MGF_Impl)
done

theorem ehoare_relative_complete: "⊨ₑ {P} e {Q} ⟹ {} ⊢ₑ {P} e {Q}"
apply (rule eMGF_implies_complete)
apply  (erule_tac [2] asm_rl)
apply (rule allI)
apply (rule MGF_lemma [THEN conjunct2, rule_format])
apply (rule MGF_Impl)
done
```

lemma *cFalse: "A ⊢ {λs. False} c {Q}"*
apply *(rule cThin)*
apply *(rule hoare_relative_complete)*
apply *(auto simp add: valid_def)*
done

lemma *eFalse: "A ⊢$_e$ {λs. False} e {Q}"*
apply *(rule eThin)*
apply *(rule ehoare_relative_complete)*
apply *(auto simp add: evalid_def)*
done

end

8 Example

theory *Example*
imports *Equivalence*
begin

```
class Nat {

  Nat pred;

  Nat suc()
    { Nat n = new Nat(); n.pred = this; return n; }

  Nat eq(Nat n)
    { if (this.pred != null) if (n.pred != null) return this.pred.eq(n.pred);
                             else return n.pred; // false
      else if (n.pred != null) return this.pred; // false
           else return this.suc(); // true
    }

  Nat add(Nat n)
    { if (this.pred != null) return this.pred.add(n.suc()); else return n; }

  public static void main(String[] args) // test x+1=1+x
    {
        Nat one = new Nat().suc();
        Nat x   = new Nat().suc().suc().suc().suc();
        Nat ok = x.suc().eq(x.add(one));
        System.out.println(ok != null);
    }
}
```

axiomatization where
This_neq_Par [simp]: "This ≠ Par" **and**
Res_neq_This [simp]: "Res ≠ This"

8.1 Program representation

axiomatization
N :: cname (‹Nat›)

```
  and pred :: fname
  and suc add :: mname
  and any  :: vname

abbreviation
  dummy :: expr (<<>>)
  where "<> == LAcc any"

abbreviation
  one :: expr
  where "one == {Nat}new Nat..suc(<>)"
```

The following properties could be derived from a more complete program model, which we leave out for laziness.

```
axiomatization where Nat_no_subclasses [simp]: "D ≼C Nat = (D=Nat)"

axiomatization where method_Nat_add [simp]: "method Nat add = Some
  ⦇ par=Class Nat, res=Class Nat, lcl=[],
   bdy= If((LAcc This..pred))
          (Res :== {Nat}(LAcc This..pred)..add({Nat}LAcc Par..suc(<>)))
        Else Res :== LAcc Par ⦈"

axiomatization where method_Nat_suc [simp]: "method Nat suc = Some
  ⦇ par=NT, res=Class Nat, lcl=[],
   bdy= Res :== new Nat;; LAcc Res..pred :== LAcc This ⦈"

axiomatization where field_Nat [simp]: "field Nat = Map.empty(pred↦Class Nat)"

lemma init_locs_Nat_add [simp]: "init_locs Nat add s = s"
by (simp add: init_locs_def init_vars_def)

lemma init_locs_Nat_suc [simp]: "init_locs Nat suc s = s"
by (simp add: init_locs_def init_vars_def)

lemma upd_obj_new_obj_Nat [simp]:
  "upd_obj a pred v (new_obj a Nat s) = hupd(a↦(Nat, Map.empty(pred↦v))) s"
by (simp add: new_obj_def init_vars_def upd_obj_def Let_def)
```

8.2 “atleast” relation for interpretation of Nat “values”

```
primrec Nat_atleast :: "state ⇒ val ⇒ nat ⇒ bool" (<_:_ ≥ _> [51, 51, 51] 50) where
  "s:x≥0     = (x≠Null)"
| "s:x≥Suc n = (∃a. x=Addr a ∧ heap s a ≠ None ∧ s:get_field s a pred≥n)"

lemma Nat_atleast_lupd [rule_format, simp]:
 "∀s v::val. lupd(x↦y) s:v ≥ n = (s:v ≥ n)"
apply (induct n)
by  auto

lemma Nat_atleast_set_locs [rule_format, simp]:
 "∀s v::val. set_locs l s:v ≥ n = (s:v ≥ n)"
apply (induct n)
by auto

lemma Nat_atleast_del_locs [rule_format, simp]:
 "∀s v::val. del_locs s:v ≥ n = (s:v ≥ n)"
apply (induct n)
by auto
```

```
lemma Nat_atleast_NullD [rule_format]: "s:Null ≥ n ⟶ False"
apply (induct n)
by auto

lemma Nat_atleast_pred_NullD [rule_format]:
"Null = get_field s a pred ⟹ s:Addr a ≥ n ⟶ n = 0"
apply (induct n)
by (auto dest: Nat_atleast_NullD)

lemma Nat_atleast_mono [rule_format]:
"∀a. s:get_field s a pred ≥ n ⟶ heap s a ≠ None ⟶ s:Addr a ≥ n"
apply (induct n)
by auto

lemma Nat_atleast_newC [rule_format]:
  "heap s aa = None ⟹ ∀v::val. s:v ≥ n ⟶ hupd(aa↦obj) s:v ≥ n"
apply (induct n)
apply  auto
apply  (case_tac "aa=a")
apply   auto
apply (tactic "smp_tac context 1 1")
apply (case_tac "aa=a")
apply  auto
done
```

8.3 Proof(s) using the Hoare logic

```
theorem add_homomorph_lb:
  "{} ⊢ {λs. s:s<This> ≥ X ∧ s:s<Par> ≥ Y} Meth(Nat,add) {λs. s:s<Res> ≥ X+Y}"
apply (rule hoare_ehoare.Meth)
apply clarsimp
apply (rule_tac P'= "λZ s. (s:s<This> ≥ fst Z ∧ s:s<Par> ≥ snd Z) ∧ D=Nat" and
       Q'= "λZ s. s:s<Res> ≥ fst Z+snd Z" in AxSem.Conseq)
prefer 2
apply  (clarsimp simp add: init_locs_def init_vars_def)
apply rule
apply (case_tac "D = Nat", simp_all, rule_tac [2] cFalse)
apply (rule_tac P = "λZ Cm s. s:s<This> ≥ fst Z ∧ s:s<Par> ≥ snd Z" in AxSem.Impl1)
apply (clarsimp simp add: body_def)
apply (rename_tac n m)
apply (rule_tac Q = "λv s. (s:s<This> ≥ n ∧ s:s<Par> ≥ m) ∧
        (∃a. s<This> = Addr a ∧ v = get_field s a pred)" in hoare_ehoare.Cond)
apply  (rule hoare_ehoare.FAcc)
apply  (rule eConseq1)
apply   (rule hoare_ehoare.LAcc)
apply  fast
apply auto
prefer 2
apply  (rule hoare_ehoare.LAss)
apply  (rule eConseq1)
apply   (rule hoare_ehoare.LAcc)
apply  (auto dest: Nat_atleast_pred_NullD)
apply (rule hoare_ehoare.LAss)
apply (rule_tac
    Q = "λv   s. (∀m. n = Suc m ⟶ s:v ≥ m) ∧ s:s<Par> ≥ m" and
    R = "λT P s. (∀m. n = Suc m ⟶ s:T ≥ m) ∧ s:P  ≥ Suc m"
    in hoare_ehoare.Call)
apply   (rule hoare_ehoare.FAcc)
apply   (rule eConseq1)
```

```
apply    (rule hoare_ehoare.LAcc)
apply   clarify
apply   (drule sym, rotate_tac -1, frule (1) trans)
apply   simp
prefer 2
apply  clarsimp
apply  (rule hoare_ehoare.Meth)
apply  clarsimp
apply  (case_tac "D = Nat", simp_all, rule_tac [2] cFalse)
apply  (rule AxSem.Conseq)
apply   rule
apply   (rule hoare_ehoare.Asm)
apply   (rule_tac a = "((case n of 0 ⇒ 0 | Suc m ⇒ m),m+1)" in UN_I, rule+)
apply  (clarsimp split: nat.split_asm dest!: Nat_atleast_mono)
apply rule
apply (rule hoare_ehoare.Call)
apply   (rule hoare_ehoare.LAcc)
apply  rule
apply  (rule hoare_ehoare.LAcc)
apply clarify
apply (rule hoare_ehoare.Meth)
apply clarsimp
apply  (case_tac "D = Nat", simp_all, rule_tac [2] cFalse)
apply (rule AxSem.Impl1)
apply (clarsimp simp add: body_def)
apply (rule hoare_ehoare.Comp)
prefer 2
apply  (rule hoare_ehoare.FAss)
prefer 2
apply   rule
apply   (rule hoare_ehoare.LAcc)
apply  (rule hoare_ehoare.LAcc)
apply (rule hoare_ehoare.LAss)
apply (rule eConseq1)
apply  (rule hoare_ehoare.NewC)
apply (auto dest!: new_AddrD elim: Nat_atleast_newC)
done


end
```

References

[1] T. Nipkow, D. v. Oheimb, and C. Pusch. μJava: Embedding a programming language in a theorem prover. In F. L. Bauer and R. Steinbrüggen, editors, *Foundations of Secure Computation*, volume 175 of *NATO Science Series F: Computer and Systems Sciences*, pages 117–144. IOS Press, 2000.

[2] D. v. Oheimb and T. Nipkow. Hoare logic for NanoJava: Auxiliary variables, side effects and virtual methods revisited, 2002. Submitted for publication.

[3] D. von Oheimb. Hoare logic for Java in Isabelle/HOL. *Concurrency: Practice and Experience*, 598:??–??+43, 2001. https://isabelle.in.tum.de/Bali/papers/CPE01.html, to appear.